



PLUSTRUSS INDUSTRIAL LIMITED



凯威演出器材（深圳）有限公司
PLUSTRUSS INDUSTRIAL LIMITED

深圳市宝安区沙井街道衙边村第一工业区A6栋

Building A6, Yabian Industrial Area, Shajing Town, Bao'an District,
Shenzhen GuangDong Province, P. R. China

Tel: +86-755-23501427

Fax: +86-755-85279169

E-mail: info@plustruss.com

Web: www.plustruss.com



PLUSTRUSS INDUSTRIAL LIMITED was founded in 2009, our team have more than 10 year's design and production experience in TRUSS, STAGE, BARRIER, as well as Aluminum accessories.

In order to guarantee the quality and safety, PLUSTRUSS applied German TUV certification according to EN 1090-1: 2009+A1: 2011, and also made German TUV management Certification ISO 9001:2008. Besides that, All our welder were well trained and obtained TUV Welding Certification.

PLUSTRUSS Provided strength calculation for different truss type, which would be the "safety guilder" When customer is using our trusses. Moreover, most of our CLAMPS are also been TUV CERTIFIED.

Since the establish of the company, our product have been exported to various countries in Europe, America, Asia, Africa and Latin America, winning high comments from all customer with great quality products and services.



TÜV NORD

CERTIFICATE

Conformity of the Factory Production Control

0045-CPR-1090-1.00391.TÜVNORD.2014.004

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the following construction product:

Construction product	Structural components and kits for aluminium structures to EXC3 according to EN 1090-3
Intended use	for load-bearing structures in all types of buildings
CE - marking method	ZA.3.2 to ZA.3.5 acc. to EN 1090-1:2009+A1:2011
Manufacturer	produced by or for
	PLUSTRUSS INDUSTRIAL LIMITED TianXin Village, HuangJiang Town No. 80 BeiMen Lane, Building B2, RongShuTou Industrial Park 523750 DongGuan City, GuangDong Province CHINA
Manufacturing plant Production facility of the manufacturer	PLUSTRUSS INDUSTRIAL LIMITED TianXin Village, HuangJiang Town No. 80 BeiMen Lane, Build. B2/C, RongShuTou Industrial Park 523750 DongGuan City, GuangDong Province CHINA
Confirmation	This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the harmonised standard EN 1090-1:2009+A1:2011 under system 2+ are applied, and that the factory production control fulfills all the prescribed requirements stated therein.
Date of issue	31.07.2014
Validity end	04.12.2020
Period of validity	This certificate will remain valid as long as the test methods and/or the factory production control requirements included in the harmonised standard used to assess the performance of the declared characteristics do not change, and the product and the manufacturing conditions in the plant are not modified significantly.
Remarks	see reverse
Place and date of issue	Hamburg, 27.02.2018 Hesse 8115382069 3462




Dipl.-Ing. Kaschner
Head of certification body

TÜV NORD Systems GmbH & Co. KG, Große Bahnstraße 31, 22525 Hamburg, GERMANY

DEVELOPMENT

HISTORY

发展历程

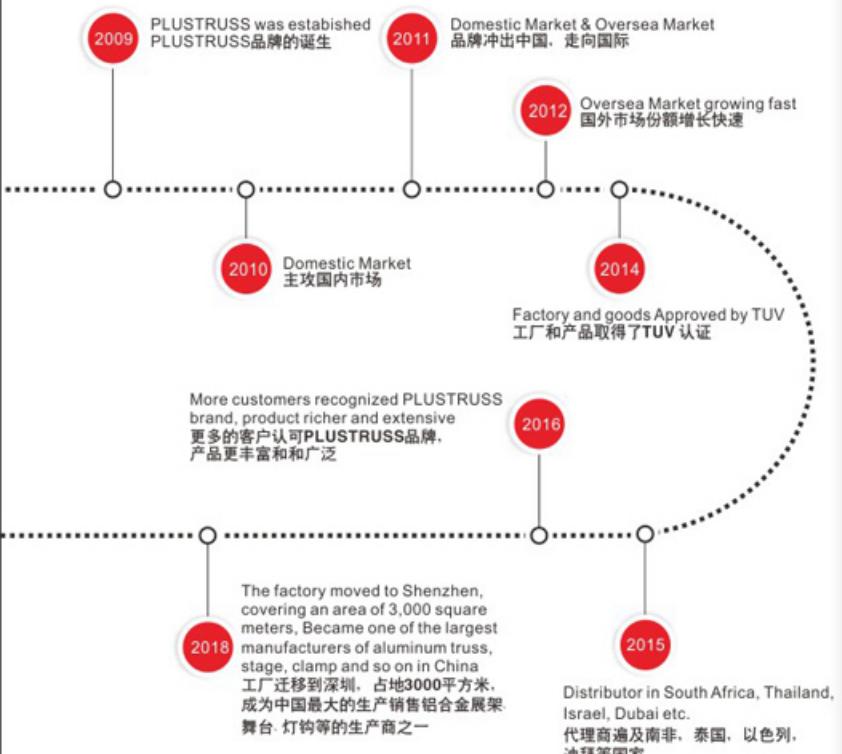


2019

We are working on it to make
PLUSTRUSS the representative
of brands in the industry
我们将继续努力，
使PLUSTRUSS成为行业内品牌的代表。

C 目录 CONTENT

G14	1
G22	2-5
G23	6-9
G24	10-11
G31	13
G32	14-16
G33	17-20
G34	21-23
G34P	24-25
G42	27-29
G43	30-33
G44	34-25
G44P	36-37
G44CLP	38-39
G52	41-42
G54	43-44
G7562	45-46
PLUS90	47-48
BOLT TRUSS	51-55
GROUND SUPPORT	57-60
ACCESSORIES	63-106
LED STACKING FRAME SYSTEM	109-110
FURNITURE	111-113
FRAME FOR STAGE LIGHT	114
STAGE	115-116
BARRIER	117
PIPE SYSTEM	118
TUV	121-134

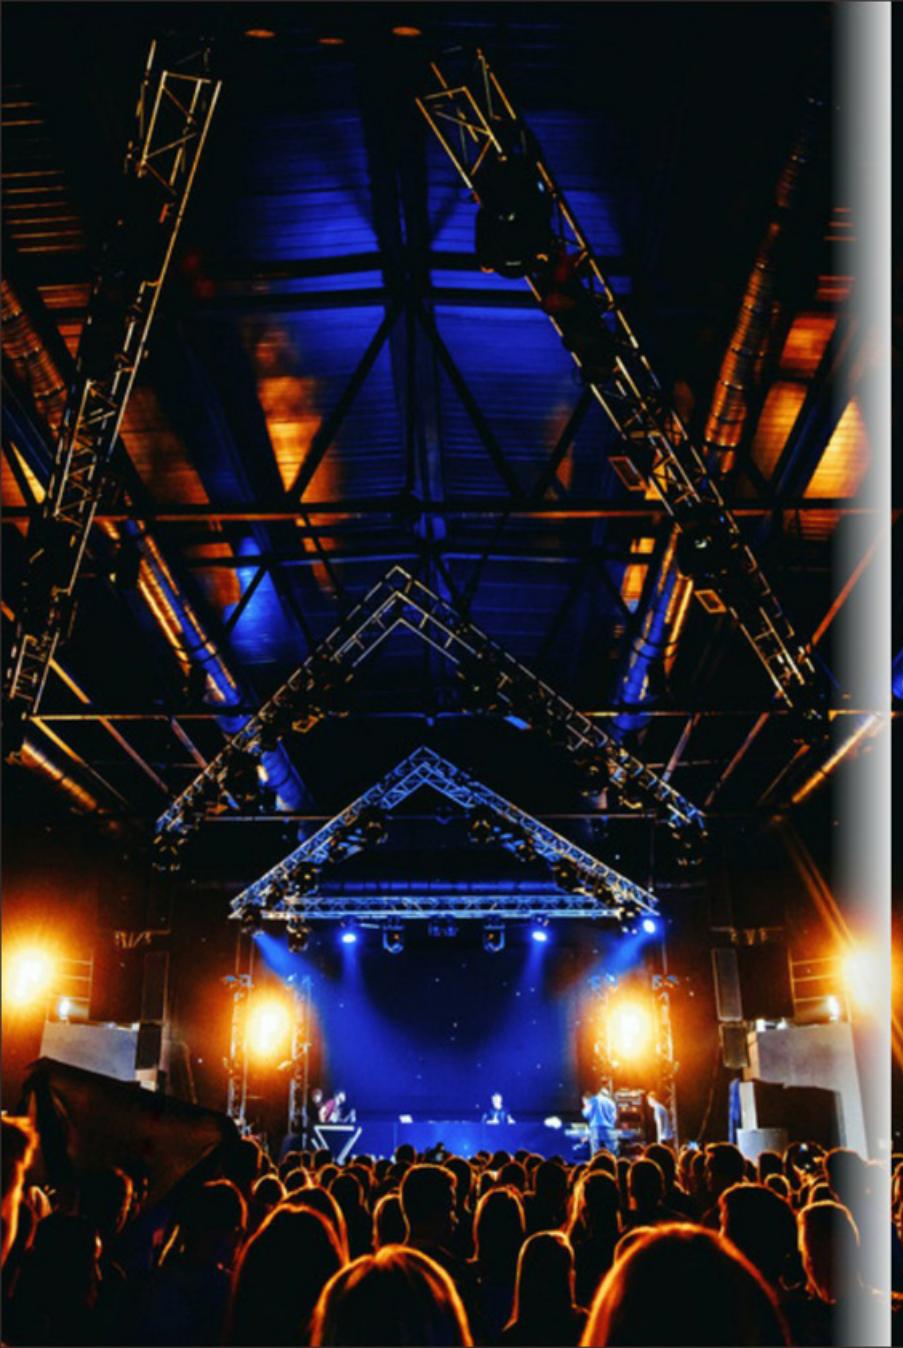


PLUSSTRUSS®

G14 G22 G23 G24

G14 G22 G23 G24

This systems allow quick and easy assembly without use of tools. The truss system good for lightweight construction, such as shops, show room, banner shapes. Any colors are available.

G14 G14



TECHNICAL DATA

技术参数

Diameter Maintube	主管	20mm
Thickness	管壁	2mm
Brace	小管	6mm
Connector Included	含配件	

G14 SQUARE G14 直展 (Any colors are available)

Code 图号	Length 长度
G14050	50cm
G14100	100cm
G14150	150cm
G14200	200cm
G14250	250cm
G14300	300cm

G14 CIRCLE G14 弧形 (Any colors are available)

Code 图号	Diameter 直径	Part/Set 弧度
G14R10-90	2.0m	2Part/Set
G14R15-90	3.0m	4Part/Set
G14R20-45	4.0m	4Part/Set



BOX CORNER SILVER CODE G14BOX
连接方头 图号 G14BOX
L100 W100 H100(mm)



BOLT CODE G14BOLT
合页 图号 G14BOLT



BASE PLATE CODE G14BASE
底板 图号 G14BASE
L100 W100 H035(mm)

G22 G22



TECHNICAL DATA

技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm
Connector Included	含配件	

G22 STEP G22 直展



Code 图号	Length 长度
G22050	50cm
G22100	100cm
G22150	150cm
G22200	200cm
G22250	250cm
G22300	300cm
G22350	350cm
G22400	400cm
G22450	450cm
G22500	500cm

TECHNICAL DATA 技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm
Connector Included	含配件	

G22



G22 CIRCLE HORIZONTAL G22 水平弧形

Code 图号	Diameter 直径	Part/Set 强度
G22R10-180H	2.0m	2Part/Set
G22R15-90H	3.0m	4Part/Set
G22R20-90H	4.0m	4Part/Set
G22R25-45H	5.0m	3Part/Set
G22R30-45H	6.0m	3Part/Set
G22R35-45H	7.0m	3Part/Set
G22R40-45H	8.0m	3Part/Set
G22R45-45H	9.0m	3Part/Set
G22R50-30H	10.0m	12Part/Set



G22 CIRCLE VERTICAL G22 垂直弧形

Code 图号	Diameter 直径	Part/Set 强度
G22R10-180V	2.0m	2Part/Set
G22R15-90V	3.0m	4Part/Set
G22R20-90V	4.0m	4Part/Set
G22R25-45V	5.0m	3Part/Set
G22R30-45V	6.0m	3Part/Set
G22R35-45V	7.0m	3Part/Set
G22R40-45V	8.0m	3Part/Set
G22R45-45V	9.0m	3Part/Set
G22R50-30V	10.0m	12Part/Set



TECHNICAL DATA 技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm

G22



45° 2WAY C19 H CODE G22C19H
45° 2通弯头 图号 G22C19H
L1000 W1000 H035(mm)



45° 2WAY C19 V CODE G22C19V
45° 2通弯头 图号 G22C19V
L1000 W1000 H220(mm)



60° 2WAY C20 H CODE G22C20H
60° 2通弯头 图号 G22C20H
L1000 W1000 H035(mm)



60° 2WAY C20 V CODE G22C20V
60° 2通弯头 图号 G22C20V
L1000 W1000 H035(mm)



90° 2WAY C21 H CODE G22C21H
90° 2通弯头 图号 G22C21H
L500 W500 H035(mm)



90° 2WAY C21 V CODE G22C21V
90° 2通弯头 图号 G22C21V
L500 W500 H220(mm)



120° 2WAY C22 H CODE G22C22H
120° 2通弯头 图号 G22C22H
L500 W500 H035(mm)



120° 2WAY C22 V CODE G22C22V
120° 2通弯头 图号 G22C22V
L500 W500 H220(mm)



135° 2WAY C23 H CODE G22C23H
135° 2通弯头 图号 G22C23H
L500 W500 H035(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm
Connector Included	含配件	

G22


135° 2WAY C23 V CODE G22T23V
135° 2通弯头 图号 G22C23V
L500 W500 H220(mm)



3WAY CORNER C31 H CODE G22C31H
3通弯头 图号 G22C31H
L500 W500 H500(mm)




3WAY CORNER C31 V CODE G22C31V
3通弯头 图号 G22C31V
L500 W500 H500(mm)



3 WAY "T" T35 H CODE G22T35H
3通弯头 图号 G22T35H
L500 W500 H035(mm)



3 WAY "T" T35 V CODE G22T35V
3通弯头 图号 G22T35V
L500 W500 H220(mm)



X CROSS C41 H CODE G22C41H
4通弯头 图号 G22C41H
L500 W500 H035(mm)



X CROSS C41 V CODE G22C41V
4通弯头 图号 G22C41V
L500 W500 H220(mm)



4 WAY C42 H CODE G22C42H
4通弯头 图号 G22C42H
L500 W500 H500(mm)



4 WAY C42 V CODE G22T42V
4通弯头 图号 G22T42V
L500 W500 H500(mm)

G23

TECHNICAL DATA 技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm
Connector Included	含配件	

G23 TRIANGLE 直展


Code	Length
G23050	50cm
G23100	100cm
G23150	150cm
G23200	200cm
G23250	250cm
G23300	300cm
G23350	350cm
G23400	400cm
G23450	450cm
G23500	500cm

G23 TRIANGLE CIRCLE 三边弧形


Code	Diameter	Part/Set
G23R05-150	1.0m	2Part/Set
G23R10-90	2.0m	4Part/Set
G23R15-90	3.0m	4Part/Set
G23R20-90	4.0m	4Part/Set
G23R25-90	5.0m	4Part/Set
G23R30-60	6.0m	6Part/Set
G23R35-60	7.0m	6Part/Set
G23R40-60	8.0m	6Part/Set
G23R45-60	9.0m	6Part/Set
G23R50-30	10.0m	12Part/Set
G23R50-45	10.0m	8Part/Set

TECHNICAL DATA 技术参数

Pipe Diameter 主管 35mm
Wall Thickness 壁厚 1.6mm
Material 材质 6082-T6
Brace 小管 8mm.
Connector Included 含配件



45°2WAY C19 CODE G23C19
45°2通弯头 图号 G23C19
L1000 W1000 H194(mm)



60°2WAY C20 CODE G23C20
60°2通弯头 图号 G23C20
L1000 W1000 H194(mm)



90°2WAY C21 CODE G23C21
90°2通弯头 图号 G23C21
L500 W500 H194(mm)



120°2WAY C22 CODE G23C22
120°2通弯头 图号 G23C22
L500 W500 H194(mm)



135°2WAY C23 CODE G23C23
135°2通弯头 图号 G23C23
L500 W500 H194(mm)



90°2WAY C24 CODE G23C24
90°2通弯头 图号 G23C24
L500 W500 H220(mm)



90°2WAY C25 CODE G23C25
90°2通弯头 图号 G23C25
L500 W500 H220(mm)



3WAY C31 CODE G23C31
3通弯头 图号 G23C31
L500 W500 H500(mm)



3WAY C32 CODE G23C32
3通弯头 图号 G23C32
L500 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter 主管 35mm
Wall Thickness 壁厚 1.6mm
Material 材质 6082-T6
Brace 小管 8mm.
Connector Included 含配件



4 WAY C33 CODE G23T33
4通弯头 图号 G23T33
L500 W500 H500(mm)



4 WAY C34 CODE G23C34
4通弯头 图号 G23C34
L500 W500 H500(mm)



3 WAY T35 CODE G23T35
3通弯头 图号 G23T35
L500 W500 H220(mm)



3 WAY T36 CODE G23T36
3通弯头 图号 G23T36
L500 W500 H194(mm)



3 WAY T37 CODE G23T37
3通弯头 图号 G23T37
L500 W500 H220(mm)



3 WAY T38 CODE G23T38
3通弯头 图号 G23T38
L500 W500 H220(mm)



3 WAY T39 CODE G23T39
3通弯头 图号 G23T39
L500 W500 H220(mm)



4 WAY T41 CODE G23T41
4通弯头 图号 G23T41
L500 W500 H194(mm)



4 WAY T42 CODE G23T42
4通弯头 图号 G23T42
L500 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm
Connector Included	含配件	



4WAY T43 CODE G23T43
4通弯头 图号 G23T43
L500 W500 H500(mm)



4WAY C44 CODE G23C44
4通弯头 图号 G23C44
L500 W500 H500(mm)



4WAY C45 CODE G23C45
4通弯头 图号 G23C45
L500 W500 H500(mm)



4WAY T47 CODE G23T47
4通弯头 图号 G23T47
L500 W500 H220(mm)



4WAY T51 CODE G23T51
4通弯头 图号 G23T51
L500 W500 H500(mm)



5WAY T52 CODE G23T52
5通弯头 图号 G23T52
L500 W500 H500(mm)



5WAY T53 CODE G23T53
5通弯头 图号 G23T53
L500 W500 H220(mm)




6WAY T61 CODE G23T61
6通弯头 图号 G23T61
L500 W500 H500(mm)



BASE PLATE CODE G23Base
底板 图号 G23Base
L053 W240 H240(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	35mm
Wall Thickness	管壁	1.6mm
Material	材质	6082-T6
Brace	小管	8mm
Connector Included	含配件	


G24 SQUARE G24 直展

Code	Length
G24050	50cm
G24100	100cm
G24150	150cm
G24200	200cm
G24250	250cm
G24300	300cm
G24350	350cm
G24400	400cm
G24450	450cm
G24500	500cm

G24 SQUARE CIRCLE
G24 四边弧形


Code	Diameter	Part/Set
G24R05-130	1.0m	2Part/Set
G24R10-90	2.0m	4Part/Set
G24R15-90	3.0m	4Part/Set
G24R20-90	4.0m	4Part/Set
G24R25-90	5.0m	4Part/Set
G24R30-60	6.0m	6Part/Set
G24R35-60	7.0m	6Part/Set
G24R40-60	8.0m	6Part/Set
G24R45-60	9.0m	6Part/Set
G24R50-30	10.0m	12Part/Set



G32 G33 G34 G34P

The conical connection of these systems allow the system assemble in the shortest time. This truss system is the most widely used in the industry. The systems are good for Event Technology, Trade Fair construction and ship fitting. Any colors are available.

G31 G31



Φ50mm

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Connector Included	含配件	



G31 SINGLE TUBE G31 单支管

Code 图号	Length 长度
G31050	50cm
G31100	100cm
G31150	150cm
G31200	200cm
G31250	250cm
G31300	300cm

G31 CIRCLE G31 弧形单支管

Code 图号	Diameter 直径	Part/Set 弧度
G31R5.0-180	1.5m	2Part/Set
G31R7.5-90	1.5m	4Part/Set
G31R10-90	2.0m	4Part/Set
G31R12.5-90	2.5m	3Part/Set



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	



G32 STEP G32 两边形直展



Code 图号	Length 长度
G32050	50cm
G32100	100cm
G32150	150cm
G32200	200cm
G32250	250cm
G32300	300cm
G32350	350cm
G32400	400cm
G32450	450cm
G32500	500cm



G32 CIRCLE HORIZONTAL G32 水平弧形

Code 图号	Diameter 直径	Part/Set 弧度
G32R10-180H	2.0m	2Part/Set
G32R15-90H	3.0m	4Part/Set
G32R20-90H	4.0m	4Part/Set
G32R25-45H	5.0m	3Part/Set
G32R30-45H	6.0m	3Part/Set
G32R35-45H	7.0m	3Part/Set
G32R40-45H	8.0m	3Part/Set
G32R45-45H	9.0m	3Part/Set
G32R50-30H	10.0m	12Part/Set



G32 CIRCLE VERTICAL G32 两边弧形

Code 图号	Diameter 直径	Part/Set 弧度
G32R10-180V	2.0m	2Part/Set
G32R15-90V	3.0m	4Part/Set
G32R20-90V	4.0m	4Part/Set
G32R25-45V	5.0m	3Part/Set
G32R30-45V	6.0m	3Part/Set
G32R35-45V	7.0m	3Part/Set
G32R40-45V	8.0m	3Part/Set
G32R45-45V	9.0m	3Part/Set
G32R50-30V	10.0m	12Part/Set

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	

G32



45° 2WAY C19H CODE G32C19H
45° 2通弯头 图号 G32C19H
L500 W1000 H1000(mm)



45° 2WAY C19V CODE G32C19V
45° 2通弯头 图号 G32C19V
L280 W1000 H1000(mm)



60° 2WAY C20 H CODE G32C20H
60° 2通弯头 图号 G32C20H
L500 W1000 H1000(mm)



60° 2WAY C20 V CODE G32C20V
60° 2通弯头 图号 G32C20V
L290 W1000 H1000(mm)



90° 2WAY C21 H CODE G32C21H
90° 2通弯头 图号 G32C21H
L500 W500 H500(mm)



90° 2WAY C21 V CODE G32C21V
90° 2通弯头 图号 G32C21V
L290 W500 H500(mm)



120° 2WAY C22 H CODE G32C22H
120° 2通弯头 图号 G32C22H
L500 W500 H500(mm)



120° 2WAY C22 V CODE G32C22V
120° 2通弯头 图号 G32C22V
L290 W500 H500(mm)



135° 2WAY C23 H CODE G32C23H
135° 2通弯头 图号 G32C23H
L500 W500 H500(mm)



BASE PLATE CODE G32BASE
底板 图号 G32BASE
L650 W380 H040(mm)

G32



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm

Connector Included 含配件



135° 2WAY C23 V CODE G32C23V
135° 2通弯头 图号 G32C23V
L290 W500 H500(mm)



3WAY C31 H CODE G32C31H
3通弯头 图号 G32C31H
L500 W500 H500(mm)



3WAY C31 V CODE G32C31V
3通弯头 图号 G32C31V
L500 W500 H500(mm)



3 WAY T35 H CODE G32T35H
3通弯头 图号 G32T35H
L500 W500 H500(mm)



3 WAY T35 V CODE G32T35V
3通弯头 图号 G32T35V
L290 W500 H500(mm)



4 WAY CROSS CODE G32C41H
4通弯头 图号 G32C41H
L500 W500 H500(mm)



4 WAY CROSS CODE G32C41V
4通弯头 图号 G32C41V
L290 W500 H500(mm)




4 WAY "T"42 H CODE G32T42H
4通弯头 图号 G32T42H
L500 W500 H500(mm)



4 WAY "T"42 V CODE G32T42V
4通弯头 图号 G32T42V
L500 W500 H500(mm)

G33 G33



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	



G33 TRIANGLE G33 直展

Code	Length
G33050	50cm
G33100	100cm
G33150	150cm
G33200	200cm
G33250	250cm
G33300	300cm
G33350	350cm
G33400	400cm
G33450	450cm
G33500	500cm

G33 TRIANGLE CIRCLE G33 三边弧形

Code	Diameter	Part/Set
G33R10~90	2.0m	2Part/Set
G33R15~90	3.0m	4Part/Set
G33R20~90	4.0m	4Part/Set
G33R25~45	5.0m	3Part/Set
G33R30~45	6.0m	3Part/Set
G33R35~45	7.0m	3Part/Set
G33R40~45	8.0m	3Part/Set
G33R45~45	9.0m	3Part/Set
G33R50~30	10.0m	12Part/Set

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	

G33


45°2WAY C19 CODE G33C19
45°2通弯头 图号 G33C19
L257 W1000 H1000(mm)



60°2WAY C20 CODE G33C20
60°2通弯头 图号 G33C20
L257 W1000 H1000(mm)



90°2WAY C21 CODE G33C21
90°2通弯头 图号 G33C21
L257 W500 H500(mm)



120°2WAY C22 CODE G33C22
120°2通弯头 图号 G33C22
L257 W500 H500(mm)



135°2WAY C23 CODE G33C23
135°2通弯头 图号 G33C23
L257 W500 H500(mm)



90°2WAY C24 CODE G33C24
90°2通弯头 图号 G33C24
L290 W500 H500(mm)



90°2WAY C25 CODE G33C25
90°2通弯头 图号 G33C25
L290 W500 H500(mm)



3WAY C31 CODE G33C31
3通弯头 图号 G33C31
L500 W500 H500(mm)



3WAY C32 CODE G33C32
3通弯头 图号 G33C32
L500 W500 H500(mm)



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	



3 WAY C33 CODE G33C33
3通弯头 图号 G33C33
L500 W500 H500(mm)



3 WAY C34 CODE G33C34
3通弯头 图号 G33C34
L500 W500 H500(mm)



3 WAY T35 CODE G33C35
3通弯头 图号 G33C35
L290 W500 H500(mm)



3 WAY T36 CODE G33T36
3通弯头 图号 G33T36
L257 W500 H500(mm)



3 WAY T37 CODE G33T37
3通弯头 图号 G33T37
L257 W500 H500(mm)



3 WAY T38 CODE G33T38
3通弯头 图号 G33T38
L290 W500 H500(mm)



3 WAY T39 CODE G33T39
3通弯头 图号 G33T39
L257 W500 H500(mm)



4 WAY CROSS CODE G33C41
4通弯头 图号 G33C41
L257 W500 H500(mm)



4 WAY T42 CODE G33T42
4通弯头 图号 G33T42
L500 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm



4WAY T43 CODE G33T43
4通弯头 图号 G33T43
L290 W500 H500(mm)



4WAY 90° CODE G33C44
90° 4通弯头 图号 G33C44
L500 W500 H500(mm)



4WAY 90° CODE G33C45
90° 4通弯头 图号 G33C45
L500 W500 H500(mm)



4WAY 90° CODE G33T47
90° 4通弯头 图号 G33T47
L500 W500 H500(mm)



5WAY C51 CODE G33C51
5通弯头 图号 G33C51
L500 W500 H500(mm)



5WAY C52 CODE G33C52
5通弯头 图号 G33C52
L500 W500 H500(mm)



5WAY C53 CODE G33C53
5通弯头 图号 G33C53
L500 W500 H500(mm)




6WAY C61 CODE G33C61
6通弯头 图号 G33C61
L500 W500 H500(mm)



BASE PLATE CODE G33Base
底板 图号 G33Base
L308 W308 H060(mm)

G34 G34



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	


G34 SQUARE G34 直展

Code	Length
G34050	50cm
G34100	100cm
G34150	150cm
G34200	200cm
G34250	250cm
G34300	300cm
G34350	350cm
G34400	400cm
G34450	450cm
G34500	500cm


G34 SQUARE CIRCLE G34 四边彌形

Code	Diameter	Part/Set
G34R10-130	2.0m	2Part/Set
G34R15-90	3.0m	4Part/Set
G34R20-90	4.0m	4Part/Set
G34R25-45	5.0m	3Part/Set
G34R30-60	6.0m	3Part/Set
G34R35-45	7.0m	3Part/Set
G34R40-45	8.0m	3Part/Set
G34R45-45	9.0m	3Part/Set
G34R50-30	10.0m	12Part/Set

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	

G34

45°2WAY C19 CODE G34C19
45°2通弯头 图号 G34C19
L290 W1000 H1000(mm)

60°2WAY C20 CODE G34C20
60°2通弯头 图号 G34C20
L290 W1000 H1000(mm)

90°2WAY C21 CODE G34C21
90°2通弯头 图号 G34C21
L290 W500 H500(mm)

120°2WAY C22 CODE G34C22
120°2通弯头 图号 G34C22
L290 W500 H500(mm)

135°2WAY C23 CODE G34C23
135°2通弯头 图号 G34C23
L290 W500 H500(mm)

90°3WAY C30 CODE G34C30
90°3通弯头 图号 G34C30
L500 W500 H500(mm)

3WAY "T" CODE G34T35
3通弯头 图号 G34T35
L290 W500 H500(mm)

4WAY "T" CODE G34T40
4通弯头 图号 G34T40
L500 W500 H500(mm)

4WAY CROSS CODE G34T41
4通弯头 图号 G34T41
L290 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	



5WAY C55 CODE G34C55
5通弯头 图号 G34C55
L500 W500 H500(mm)



6WAY C61 CODE G34C61
6通弯头 图号 G34C61
L500 W500 H500(mm)



BOX CORNER MI2 CODE G34BOX
连接方头 (M12) 图号 G34BOX
L290 W290 H290(mm)




FLAT BOX CORNER CODE G34BOX-F
连接头 图号 G34BOX-F
L290 W290 H500(mm)




BOOK CORNER-180° CODE G34BOOK
连接头 图号 G34BOOK
L290 W290 H290(mm)




BASE PLATE CODE G34BASE
底板 图号 G34BASE
L308 W308 H60(mm)

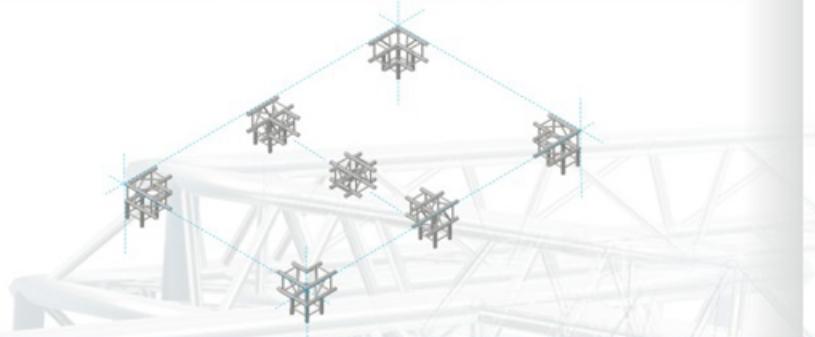

G34P


TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	3mm
Material	材质	6082-T6
Brace	小管	20x2mm
Connector Included	含配件	


G34P SQUARE G34P 直展

Code 图号	Length 长度
G34050P	50cm
G34100P	100cm
G34150P	150cm
G34200P	200cm
G34250P	250cm
G34300P	300cm
G34350P	350cm
G34400P	400cm
G34450P	450cm
G34500P	500cm


G34P SQUARE CIRCLE G34P 直展

Code 图号	Diameter 直径	Part/Set 弧度
G34R10-180P	2.0m	2Part/Set
G34R15-90P	3.0m	4Part/Set
G34R20-90P	4.0m	4Part/Set
G34R25-45P	5.0m	3Part/Set
G34R30-60P	6.0m	3Part/Set
G34R35-45P	7.0m	3Part/Set
G34R40-45P	8.0m	3Part/Set
G34R45-45P	9.0m	3Part/Set
G34R50-30P	10.0m	12Part/Set



45° 2WAY C19 CODE G34C19P
45° 2通弯头 图号 G34C19P
L290 W1000 H1000(mm)



60° 2WAY C20 CODE G34C20P
60° 2通弯头 图号 G34C20P
L290 W1000 H1000(mm)




90° 2WAY C21 CODE G34C21P
90° 2通弯头 图号 G34C21P
L290 W500 H500(mm)



90° 3WAY T30 CODE G34T30P
90° 3通弯头 图号 G34T30P
L500 W500 H500(mm)

G34P



3WAY "T" CODE G34T35P
3通弯头 图号 G34T35P
L290 W500 H500(mm)



4 WAY "T" CODE G34T40P
4通弯头 图号 G34T40P
L500 W500 H500(mm)



4 WAY CROSS CODE G34T41P
4通弯头 图号 G34T41P
L290 W500 H500(mm)



5 WAY C55 CODE G34C55P
5通弯头 图号 G34C55P
L500 W500 H500(mm)



6 WAY C61 CODE G34C61P
6通弯头 图号 G34C61P
L500 W500 H500(mm)



BOX CORNER M12 CODE G34PBOX
连接方头 图号 G34PBOX
L290 W290 H290(mm)



BASE PLATE CODE G34PBASE
底板 图号 G34BASE
L308 W308 H60(mm)

G42 G43 G44
G44P G44CLP

G42 G43 G44 G44P G44CLP

The conical connection of these systems allow the system assemble in the shortest time. This truss system is the most widely used in the industry. The systems are good for Event Technology, Trade Fair construction and ship fitting. Any colors are available.

TECHNICAL DATA

技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	



400mm

G42



G42 STEP G42 直展

Code	Length
G42050	50cm
G42100	100 cm
G42150	150 cm
G34200	200 cm
G42250	250 cm
G42300	300 cm
G42350	350 cm
G42400	400 cm
G42450	450 cm
G42500	500 cm



G42 CIRCLE HORIZONTAL G42 两边水平弧形

Code	Diameter	Part/Set
G42R10-180H	2.0m	2Part/Set
G42R15-90H	3.0m	4Part/Set
G42R20-90H	4.0m	4Part/Set
G42R25-45H	5.0m	3Part/Set
G42R30-45H	6.0m	3Part/Set
G42R35-45H	7.0m	3Part/Set
G42R40-45H	8.0m	3Part/Set
G42R45-45H	9.0m	3Part/Set
G42R50-30H	10.0m	12Part/Set




G42 CIRCLE VERTICAL G42 两边弧形

Code	Diameter	Part/Set
G42R10-180V	2.0m	2Part/Set
G42R15-90V	3.0m	4Part/Set
G42R20-90V	4.0m	4Part/Set
G42R25-45V	5.0m	3Part/Set
G42R30-45V	6.0m	3Part/Set
G42R35-45V	7.0m	3Part/Set
G42R40-45V	8.0m	3Part/Set
G42R45-45V	9.0m	3Part/Set
G42R50-30V	10.0m	12Part/Set

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	



60° 2WAY C20 H CODE G42C20H
60° 2通弯头 图号 G42C20H
L050 W1000 H1000(mm)



60° 2WAY C20 V CODE G42C20V
60° 2通弯头 图号 G42C20V
L400 W1000 H1000(mm)



90° 2WAY C21 H CODE G42C21H
90° 2通弯头 图号 G42C21H
L050 W500 H500(mm)



90° 2WAY C21 V CODE G42C21V
90° 2通弯头 图号 G42C21V
L400 W500 H500(mm)



120° 2WAY C22 H CODE G42C22H
120° 2通弯头 图号 G42C22H
L050 W500 H500(mm)



120° 2WAY C22 V CODE G42C22V
120° 2通弯头 图号 G42C22V
L400 W500 H500(mm)



135° 2WAY C23 H CODE G42C23H
135° 2通弯头 图号 G42C23H
L050 W500 H500(mm)



135° 2WAY C23 V CODE G42C23V
135° 2通弯头 图号 G42C23V
L400 W500 H500(mm)



90° 3WAY C31 H CODE G42C31H
90° 3通弯头 图号 G42C31H
L500 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	

G42


90° 2WAY C31 V CODE G42C31V
90° 2通弯头 图号 G42C31V
L500 W500 H500(mm)



3 WAY "T" CODE F42T35H
3 通弯头 图号 F42T35H
L500 W500 H500(mm)



3 WAY "T" CODE F42T35V
3 通弯头 图号 F42T35V
L500 W500 H500(mm)



4 WAY C41 H CODE G42C41H
4 通弯头 图号 G42C41H
L500 W500 H500(mm)



4 WAY C41 V CODE G42C41V
4 通弯头 图号 G42C41V
L400 W500 H500(mm)



4 WAY C42 H CODE G42C42H
4 通弯头 图号 G42C42H
L500 W500 H500(mm)



STEP CORNER CODE G42BOX
连接头 图号 G42BOX
L500 W400 H500(mm)



BASE PLATE CODE G42BASE
连接头 图号 G42BASE
L500 W418 H418(mm)

G43

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	


G43 TRIANGLE G43 直展

Code 图号	Length 长度
G43050	50cm
G43100	100cm
G43150	150cm
G43200	200cm
G43250	250cm
G43300	300cm
G43350	350cm
G43400	400cm
G43450	450cm
G43500	500cm


G43 CIRCLE G43 三边弧形

Code 图号	Diameter 直径	Part/Deg 强度
G43R10-180	2.0m	2Part/Set
G43R15-90	3.0m	4Part/Set
G43R20-90	4.0m	4Part/Set
G43R25-45	5.0m	8Part/Set
G43R30-45	6.0m	8Part/Set
G43R35-45	7.0m	8Part/Set
G43R40-45	8.0m	8Part/Set
G43R45-45	9.0m	8Part/Set
G43R50-30	10.0m	12Part/Set



45° 2WAY C19 CODE G43C19
45° 2通弯头 图号 G43C19
L553 W1000 H1000(mm)




60° 2WAY C20 CODE G43C20
60° 2通弯头 图号 G43C20
L553 W1000 H1000(mm)



90° 2WAY C21 CODE G43C21
90° 2通弯头 图号 G43C21
L500 W500 H353(mm)



120° 2WAY C22 CODE G43C22
120° 2通弯头 图号 G43C22
L500 W500 H353(mm)



135° 2WAY C23 CODE G43C23
135° 2通弯头 图号 G43C23
L500 W500 H353(mm)



90° 2WAY C24 CODE G43C24
90° 2通弯头 图号 G43C24
L500 W500 H400(mm)



90° 2WAY C25 CODE G43C25
90° 2通弯头 图号 G43C25
L500 W500 H400(mm)



90° 3WAY C31 CODE G43C31
90° 3通弯头 图号 G43C31
L500 W500 H500(mm)



90° 3WAY C32 CODE G43C32
90° 3通弯头 图号 G43C32
L500 W500 H500(mm)



90° 3WAY C33 CODE G43C33
90° 3通弯头 图号 G43C33
L500 W500 H500(mm)



90° 3WAY C34 CODE G43C34
90° 3通弯头 图号 G43C34
L500 W500 H500(mm)



3 WAY "T" CODE G43T35
3 通弯头 图号 G43T35
L400 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	



3 WAY "T" CODE G43T36
3 通弯头 图号 G43T36
L400 W500 H500(mm)



3 WAY "T" CODE G43T37
3 通弯头 图号 G43T37
L400 W500 H500(mm)



3 WAY "T" CODE G43T38
3 通弯头 图号 G43T38
L400 W500 H500(mm)



3 WAY "T" CODE G43T39
3 通弯头 图号 G43T39
L400 W500 H500(mm)



4 WAY CROSS CODE G43C41
4 通弯头 图号 G43C41
L400 W500 H500(mm)



4 WAY "T" CODE G43T42
4 通弯头 图号 G43T42
L500 W500 H500(mm)



4 WAY "T" CODE G43T43
4 通弯头 图号 G43T43
L400 W500 H500(mm)



90° 4WAY C44 CODE G43C44
90° 4通弯头 图号 G43C44
L500 W500 H500(mm)



90° 4WAY C45 CODE G43C45
90° 4通弯头 图号 G43C45
L500 W500 H500(mm)

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	



4 WAY CROSS CODE G43C47
4 通弯头 图号 G43C47
L500 W500 H500(mm)



5 WAY 'T' CODE G43T51
5 通弯头 图号 G43T51
L500 W500 H500(mm)



5 WAY CROSS CODE G43C52
5 通弯头 图号 G43C52
L500 W500 H500(mm)




5 WAY CROSS CODE G43C53
5 通弯头 图号 G43C53
L500 W500 H500(mm)



6 WAY CROSS CODE G43C61
6 通弯头 图号 G43C61
L500 W500 H500(mm)




BASE PLATE CODE G43BASE
底板 图号 G43BASE
L420 W420 H060(mm)

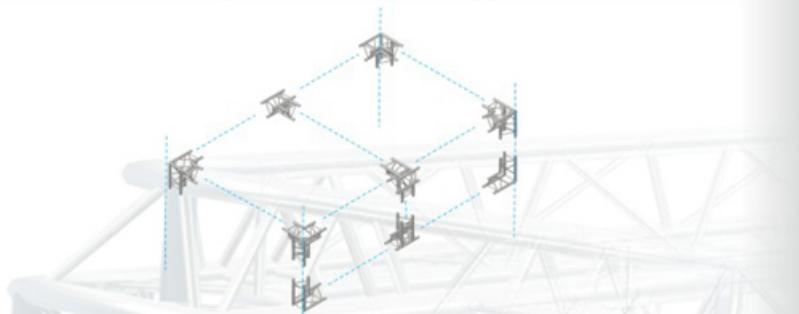

G44 G44

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	2mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	


G44 TRIANGLE G44 直展

Code	Length
G44050	50cm
G44100	100cm
G44150	150cm
G44200	200cm
G44250	250cm
G44300	300cm
G44350	350cm
G44400	400cm
G44450	450cm
G44500	500cm


G44 CIRCLE G44 四边弧形

Code	Diameter	Part/Deg
G44R10-120	2.0m	2Part/Set
G44R15-90	3.0m	4Part/Set
G44R20-90	4.0m	4Part/Set
G44R25-45	5.0m	8Part/Set
G44R30-45	6.0m	8Part/Set
G44R35-45	7.0m	8Part/Set
G44R40-45	8.0m	8Part/Set
G44R45-45	9.0m	8Part/Set
G44R50-30	10.0m	12Part/Set



45° 2WAY C19 CODE G44C19
45° 2通弯头 图号 G44C19
L1000 W1000 H400(mm)



60° 2WAY C20 CODE G44C20
60° 2通弯头 图号 G44C20
L1000 W1000 H400(mm)



90° 2WAY C21 CODE G44C21
90° 2通弯头 图号 G44C21
L500 W500 H400(mm)



120° 2WAY C22 CODE G44C22
120° 2通弯头 图号 G44C22
L500 W500 H400(mm)



135° 2WAY C23 CODE G44C23
135° 2通弯头 图号 G44C23
L500 W500 H400(mm)



90° 3 WAY C30 CODE G44C30
90° 3通弯头 图号 G44C30
L500 W500 H400(mm)



3 WAY "T" CODE G44T35
3通弯头 图号 G44T35
L500 W500 H400(mm)



4 WAY "T" CODE G44T40
4通弯头 图号 G44T40
L500 W500 H500(mm)



4 WAY CROSS CODE G44C41
4通弯头 图号 G44C41
L500 W500 H400(mm)



5 WAY CROSS CODE G44C55
5通弯头 图号 G44C55
L500 W500 H500(mm)



BOX CORNER M12 CODE G44BOX
连接方头(M12) 图号 G44BOX
L400 W400 H400(mm)




BASE PLATE CODE G44BASE
底板 图号 G44BASE
L400 W400 H050(mm)

G44P

TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	3mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	



G44P SQUARE G44P 直展

Code	Length
G44050P	50cm
G44100P	100cm
G44150P	150cm
G44200P	200cm
G44250P	250cm
G44300P	300cm
G44350P	350cm
G44400P	400cm
G44450P	450cm
G44500P	500cm



G44P CIRCLE G44P 四边弧形

Code	Diameter	Part/Deg
G44R10-180P	2.0m	2Part/Set
G44R15-90P	3.0m	4Part/Set
G44R20-90P	4.0m	4Part/Set
G44R25-45P	5.0m	8Part/Set
G44R30-45P	6.0m	8Part/Set
G44R35-45P	7.0m	8Part/Set
G44R40-45P	8.0m	8Part/Set
G44R45-45P	9.0m	8Part/Set
G44R50-30P	10.0m	12Part/Set



TECHNICAL DATA 技术参数

Pipe Diameter 主管 50mm
 Wall Thickness 管壁 3mm
 Material 材质 6082-T6
 Brace 小管 25x3mm
 Connector Included 含配件



3 WAY "T" CODE G44T35P
 3通弯头 图号 G44T35P
 L500 W500 H400(mm)



4 WAY "T" CODE G44T40P
 4通弯头 图号 G44T40P
 L500 W500 H500(mm)



4 WAY CROSS CODE G44C41P
 4通弯头 图号 G44C41P
 L500 W500 H400(mm)



5 WAY CROSS CODE G24C55P
 5通弯头 图号 G24C55P
 L500 W500 H500(mm)




BOX CORNER M12 CODE G44PBOX
 连接方头(M12) 图号 G44PBOX
 L400 W400 H400(mm)



BASE PLATE CODE G44BASE
 底板 图号 G44BASE
 L420 W420 H60(mm)




CODE ADJ CORNER
 图号 ADJ CORNER




G44P

G44CLP


TECHNICAL DATA 技术参数

Pipe Diameter 主管 50mm
 Wall Thickness 管壁 3mm
 Material 材质 6082-T6
 Brace 小管 25x3mm
 Connector Included 含配件


G44CLP SQUARE G44CLP 直展



Code 图号	Length 长度
G44050CLPB	50cm
G44100CLPB	100cm
G44150CLPB	150cm
G44200CLPB	200cm
G44250CLPB	250cm
G44300CLPB	300cm
G44350CLPB	350cm
G44400CLPB	400cm
G44450CLPB	450cm
G44500CLPB	500cm



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	3mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	


GL44CLP



YZ-TC24

TECHNICAL DATA 技术参数

Cart for 400x400 Truss	
Plate	铝板
105x86x10mm	
Square tube	方型管
55x50x50mm	
Material	材质
6082-T6	
Connector Included	含配件




G52 G54
G7652 PLU590



**G52 G54
G7652 PLU590**


The Heavy duty truss offers a high load capacity. It is good for Exhibitions, Trade Fair construction, Theatre construction.

G52 G52



TECHNICAL DATA 技术参数

Pipe Diameter 主管 50mm
 Wall Thickness 管壁 4mm
 Material 材质 6082-T6
 Brace 小管 25x3mm
 Connector Included 含配件



G52 FOLDING TRUSS G52 折叠展架

Code	Length
G52060	60cm
G52080	80cm
G52160	160cm
G52240	240cm
G52320	320cm



TECHNICAL DATA 技术参数

Pipe Diameter 主管 50mm
 Wall Thickness 管壁 4mm
 Material 质料 6082-T6
 Brace 小管 25x3mm
 Connector Included 含配件

G52


90° 2WAY C21 CODE G52C21
90° 2通弯头 图号 G52C21
L1655 W655 H655(mm)



90° 2WAY CORNER CODE G52C24
90° 2通弯头 图号 G52TC24
L500 W500 H655(mm)



3 WAY "T" CODE G52T35
3 通弯头 图号 G52T35
L655 W655 H740(mm)




4 WAY CROSS CODE G52C41
4 通弯头 图号 G52C41
L740 W740 H740(mm)



Code : GS-44TN
F44/F44P Top section for electrical chain hoist, hand chain hoist
图号 : GS-44TN
F34/F44P 底座可使用手动、电动葫芦




Code : GS52S
Sleeve for F34/34P/44/44P/52 horizontal way as beams and F44/44P vertical way
图号 : GS52S 中座
可连接F34/F34P/F44/F44P/F52

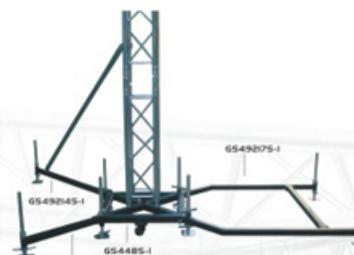

STEEL BASE 铁底座

Code: GS-F44BS-1
 Steel Base For F34/34P/44/44P Truss
 图号 : F44BS-1 底座
 Code: GS49217S-1
 Steel Ballast Outrigger
 图号 : GS492175-1 支撑脚
 Code: GS492145-1
 Steel Corner Brace 1.5m
 图号 : GS492145-1 支撑脚
 Code: GS49216S-1
 Steel Assist Leg 0.75m
 图号 : GS492165-1 支撑脚

G54 G54



TECHNICAL DATA

技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	4mm
Material	材质	6082-T6
Brace	小管	30x3mm
Connector Included	含配件	

G54 SQUARE G54 直展

Code	Diameter
G54050	50cm
G54100	100cm
G54150	150cm
G54200	200cm
G54250	250cm
G54300	300cm
G54350	350cm
G54400	400cm
G54450	450cm
G54500	500cm



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	4mm
Material	材质	6082-T6
Brace	小管	30x3mm
Connector Included	含配件	

G54




90° 2 WAY C21 CODE G54C20
90° 2通弯头 图号 G54C20



3 WAY "T" CODE G54T35
3 通弯头 图号 G54T35



4 WAY CROSS CODE G54C41
4 通弯头 图号 G54C41



BOX CORNER M12 CODE G54BOX
连接方头(M12) 图号 G54BOX



Code : GS-44TN
F44/F44P Top section for
electrical chain hoist,
hand chain hoist
图号 : GS-44TN
F34/F44P 底座可使用手动、电动葫芦




Code : GS54S
Sleeve for F34/F34P/F44/F44P/54
horizontal way as beams and
F44/F44P vertical way
图号 : GS54S 中座
可连接F34/F34P/F44/F44P/F54



STEEL BASE 铁底座


- Code: GS-F44BS-1
Steel Base For F34/34P/44/44P Truss
图号 : F44BS-1 底座
- Code: GS49217S-1
Steel Ballast Outrigger
图号 : GS49217S-1 支撑脚
- Code: GS49214S-1
Steel Corner Brace 1.5m
图号 : GS49214S-1 支撑脚
- Code: GS49216S-1
Steel Assist Leg 0.75m
图号 : GS49216S-1 支撑脚

G7652



TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	4mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	

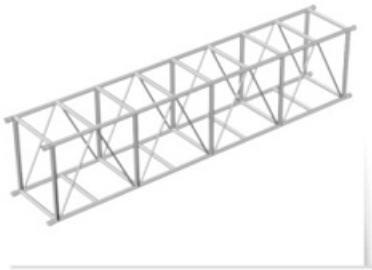


G7652 SQUARE G34PL 直展

Code 图号	Length 长度	
G7652100	100 cm	T=4.0mm
G7652200	200 cm	T=4.0mm
G7652300	300 cm	T=4.0mm
G7652400	400 cm	T=4.0mm
G7652500	500 cm	T=4.0mm



90° 2WAY C21 CODE G7652C21
90° 2通弯头 图号 G7652C21
L760 W760 H760(mm)



3 WAY "T" CODE G7652T35
3通弯头 图号 G7652T35
L760 W760 H1000(mm)


TECHNICAL DATA 技术参数

Pipe Diameter	主管	50mm
Wall Thickness	管壁	4mm
Material	材质	6082-T6
Brace	小管	25x3mm
Connector Included	含配件	

G7652



图号：GS-7652T
F7652 Top section for
electrical chain hoist,
hand chain hoist
F7652 可使用手动、电动葫芦



图号：GS7652S 中座
Sleeve for F7652 horizontal way
as beams and F44/44P
vertical way



图号：G7652-CK 连接配件
Connective part for F7652
Sleeve




图号：GS7652B
Heavy duty aluminum base
F7652/F9070
铝底座



图号：GS49214-7652
Assist leg for GS7652B
斜支撑

PLU590



TECHNICAL DATA



技术参数

Pipe Diameter	主管	48mm
Wall Thickness	管壁	4.5mm
Material	材质	6082-T6
Brace	小管	30x3mm
Connector Included	含配件	



PLU590 挂灯架

Code 图号	Length 长度
PLU590120	120cm
PLU590240	240cm
PLU590305	305cm

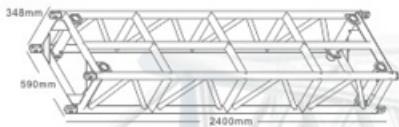

Code: PLU590Base

TECHNICAL DATA


技术参数

Hinged Base supports for use as Vertical trusses

U Plate U型板 100x86x10mm

Material 材质 S45C

Connector Included 含配件





PLUSSTRUSS®




BOLT TRUSS

**LS34J LS305
Ls308 LS30
LS40**

BOLTRUSS



LS34J



TECHNICAL DATA

技术参数

Square tube 方管	50x3mm
Diameter Maintube 主管	50mm
Thickness 管壁	3mm
Brace 小管	25x2mm
Connector Included	含配件



LS34J BOLT TRUSS LS34J 螺丝架

Code 图号	Length 长度
LS34J050	50cm
LS34J100	100cm
LS34J150	150cm
LS34J200	200cm
LS34J250	250cm
LS34J300	300cm




CODE LS34ABOX

BOX CORNER 连接方头
L300 W300 H300(mm)



LS305



LS305 SQUARE LS305 螺丝架

Code 图号	Length 长度
LS305050	50cm
LS305100	100cm
LS305150	150cm
LS305200	200cm
LS305250	250cm
LS305300	300cm
LS305350	350cm
LS305400	400cm
LS305450	450cm
LS305500	500cm


TECHNICAL DATA

技术参数

Square tube 方管	50x25X3mm
Pipe Diameter 主管	50mm
Wall Thickness 管壁	3mm
Material 材质	6082-T6
Brace 小管	25x2mm
Connector Included	含配件




LS308


LS308 BOLT TRUSS LS308 螺丝架


Code 图号	Length 长度
LS308050	50cm
LS308100	100cm
LS308150	150cm
LS308200	200cm
LS308250	250cm
LS308300	300cm
LS308350	350cm
LS308400	400cm
LS308450	450cm
LS308500	500cm

TECHNICAL DATA
技术参数

Square tube 方管 40x40x4mm
 Diameter Maintube 主管 32mm
 Thickness 管壁 2.5mm
 Brace 小管 20x2mm
 Connector Included 含配件

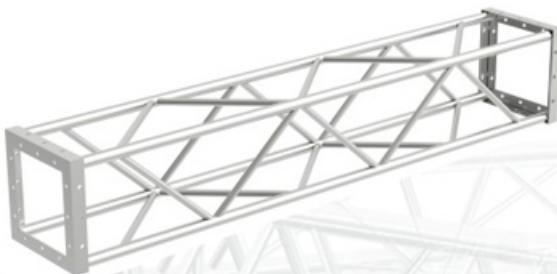

LS30


LS30 BOLT LS40 螺丝架


Code 图号	Length 长度
LS40050	50cm
LS40100	100cm
LS40150	150cm
LS40200	200cm
LS40250	250cm
LS40300	300cm
LS40350	350cm
LS40400	400cm
LS40450	450cm
LS40500	500cm

TECHNICAL DATA
技术参数

Plate 三角板 100x100x10mm
 Pipe Diameter 主管 50mm
 Wall Thickness 管壁 3mm
 Material 材质 6082-T6
 Brace 小管 30x3mm
 Connector Included 含配件



LS40 LS40



LS40 BOLT LS40 螺丝架

Code	Length
LS40050	50cm
LS40100	100cm
LS40150	150cm
LS40200	200cm
LS40250	250cm
LS40300	300cm
LS40350	350cm
LS40400	400cm
LS40450	450cm
LS40500	500cm

TECHNICAL DATA 技术参数

Plate 三角板 100x100x10mm
Pipe Diameter 主管 50mm
Wall Thickness 管壁 3mm
Material 材质 6082-T6
Brace 小管 30x3mm
Connector Included 含配件



GROUND SUPPORT



GROUND
SUPPORT



GROUND SUPPORT



HAND CHAIN HOIST

1T6M	1 ton 6M hand chain hoist 1吨6米手动葫芦
1T8M	1 ton 8M hand chain hoist 1吨8米手动葫芦
1T10M	1 ton 10M hand chain hoist 1吨10米手动葫芦
2T6M	2 ton 6M hand chain hoist 2吨6米手动葫芦
2T8M	2 ton 8M hand chain hoist 2吨8米手动葫芦
2T10M	2 ton 10M hand chain hoist 2吨10米手动葫芦



GS-34T
F34/34P Top section for hand chain hoist and winch
F34/34P 顶座可使用手动葫芦



GS-34TN
F34/34P Top section for electrical chain hoist,
hand chain hoist
F34/34P 顶座可使用手动、电动葫芦



GS 34S
Sleeve for F34/34P/44/44P horizontal way as beams and F34/34P vertical way
可连接F34/F34P/F44/F44P



GS-44T
F44/F44P Top section for electrical chain hoist,
hand chain hoist
F34/F44P 顶座可使用手动、电动葫芦



GS 44S
Sleeve for F34/34P/44/44P horizontal way as beams and F44/F44P vertical way
可连接F34/F34P/F44/F44P

GROUND SUPPORT



5029HL/5029HR

5029 HL Hinge Left
左边连接头
5029 HR Hinge Right
右边连接头



BS800
Big Base Plate Square
800×800 mm
For F23/F24/F34 Truss
800×800mm 铁底板



BS680
Big Round Base Plate
680x680 mm
For F23/F24/F34 Truss
680×680mm 铁底板



STEEL BASE 铁底座


Code: GS-F44BS-1
Steel Base For F34/34P/44/44P Truss
图号 : F44BS-1 底座

Code: GS49217S-1
Steel Ballast Outrigger
图号 : GS49217S-1 支撑脚

Code: GS49214S-1
Steel Corner Brace 1.5m
图号 : GS49214S-1 支撑脚

Code: GS49216S-1
Steel Assist Leg 0.75m
图号 : GS49216S-1 支撑脚

GROUND SUPPORT

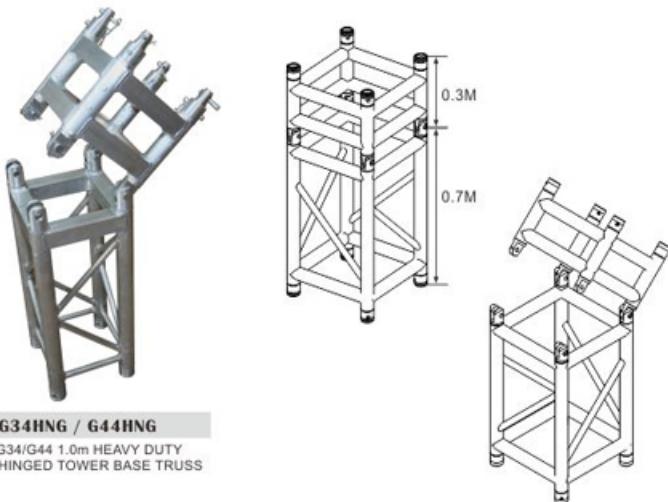


GROUND SUPPORT



YZ-QZJ03(G44)
TECHNICAL DATA
技术参数

Square tube 方管 50x85X5mm
Diameter Maintube 主管 50mm
Thickness 管壁 3mm
Brace 小管 25x3mm
Connector Included 含配件

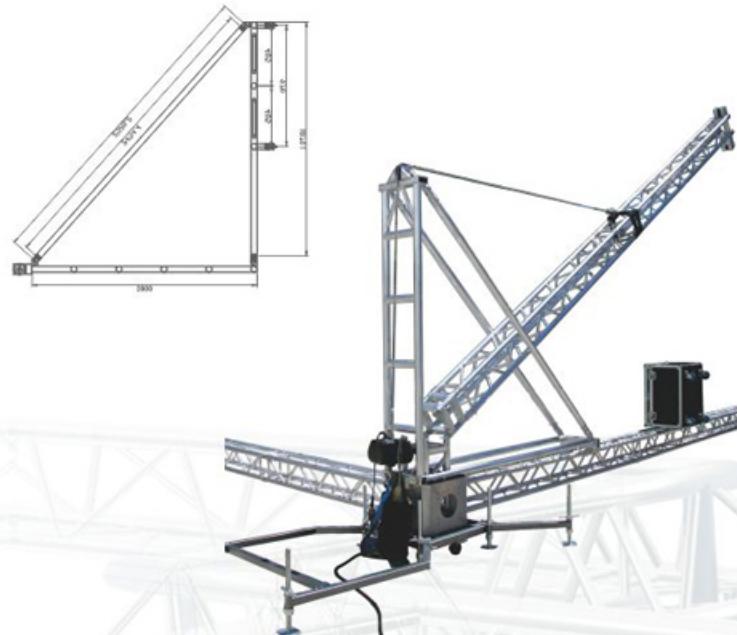



PLUSSTRUSS®




ACCESSORIES

Most Clamps are TUV certified, the clamps can fitting 20mm, 35mm, 50mm , 60mm, 80mm tube.

ACCESSORIES






料号：C0008
螺丝插销
材质：6061
适用：G32-G44P Truss




C0008
Steel pin with Nut
Bolt M8
Fit G32-G44P Truss
Material: 6061



料号：C0009
插销安全扣
材质：6061
适用：G32-G44P Truss




C0009
Steel pin with "R" clip
Fit G32-G44P Truss
Material: 6061



料号：G2001
载重：10kg
材质：6061
适用管径：20mm
单重：0.03kg
表面颜色：阳极亮银/阳极亮黑




Mini 360 F14
Code Number: G2001 Silver
G2001B Black
Material: 6061
SWL: 10kg
Tube: 20mm
Kg: 0.03kg



料号：G2001C
载重：10kg
材质：6061
适用管径：20mm
单重：0.04kg
表面颜色：阳极亮银/阳极亮黑



Mini 360 F14 with Connector
Code Number: G2001C Silver
G2001CB Black
Material: 6061
SWL: 10kg
Tube: 20mm
Kg: 0.04kg



料号: G2002

载重: 10kg

材质: 6061

适用管径: 20mm

单重: 0.05kg

表面颜色: 阳极亮银/阳极亮黑



Mini F14 Swivel Clamp

Code Number: G2002 Silver
G2002B Black

Material: 6061

SWL: 10kg

Tube: 20mm

Kg: 0.050kg



料号: G3502

载重: 50kg

材质: 6061

适用管径: 32-35mm

单重: 0.187kg

表面颜色: 阳极亮银/阳极亮黑



JR Swivel Clamp


Code Number: G3502 Silver
G3502B Black

Material: 6061

SWL: 50kg

Tube: 32-35mm

Kg: 0.187kg



料号: G3501

载重: 75kg

材质: 6061

适用管径: 32-35mm

单重: 0.134kg

表面颜色: 阳极亮银/阳极亮黑



JR Clamp


Code Number: G3501 Silver
G3501B Black

Material: 6061

SWL: 75kg

Tube: 32-35mm

Kg: 0.134kg



料号: G3501D

载重: 75kg

材质: 6061

适用管径: 32-35mm

单重: 0.153kg

表面颜色: 阳极亮银/阳极亮黑

JR Clamp with Half Connector

Code Number: G3501D Silver
G3501DB Black

Material: 6061

SWL: 75kg

Tube: 32-35mm

Kg: 0.153kg



料号: G3501E

载重: 75kg

材质: 6061

适用管径: 32–35mm

单重: 0.134kg

表面颜色: 阳极亮银/阳极亮黑

JR Clamp QR F24

Code Number: G3501E Silver


G3501EB Black

Material: 6061

SWL:75kg

Tube: 32–35mm

Kg: 0.134kg



料号: G3501X


载重: 50kg

适用管径: 32–35mm

材质: 6061

单重: 0.108kg

表面颜色: 阳极亮银/阳极亮黑



JR Clamp X

Code Number: G3501X Silver

G3501XB Black

Material: 6061

SWL: 50kg

Tube: 32–35mm

Kg: 0.108kg



料号: G3501G

载重: 75kg

材质: 6061

适用管径: 32–35mm

单重: 0.153kg

表面颜色: 阳极亮银/阳极亮黑



JR Clamp with Ring

Code Number: G3501G Silver


G3501GB Black

Material: 6061

SWL:75kg

Tube: 32–35mm

Kg: 0.153kg



料号: G3501Y


载重: 50kg

材质: 6061

适用管径: 32–35mm

单重: 0.11kg

表面颜色: 阳极亮银/阳极亮黑



JR Clamp Y

Code Number: G3501Y Silver


G3501YB Black

Material: 6061

SWL: 50kg

Tube: 32–35mm

Kg: 0.11kg



料号: G3503

载重: 75kg

材质: 6061

适用管径: 32-35mm

单重: 0.213kg

表面颜色: 阳极亮银/阳极亮黑



JR Trigger Clamp


Code Number: G3503 Silver
G3503B Black

Material: 6061

SWL: 75kg

Tube: 32-35mm

Kg: 0.213kg



料号: G3507

载重: 200kg

材质: 6061

适用管径: 32-35mm

单重: 0.198kg

表面颜色: 阳极亮银/阳极亮黑



JR Clamp H


Code Number: G3507 Silver
G3507B Black

Material: 6061

SWL: 200kg

Tube: 32-35mm

Kg: 0.198kg



料号: G3505

载重: 75kg

材质: 6061

适用管径: 32-35mm

单重: 0.576kg

表面颜色: 阳极亮银/阳极亮黑

JR Clamp Post


Code Number: G3505 Silver
G3505B Black

Material: 6061

SWL: 75kg

Tube: 32-35mm

Kg: 0.576kg



料号: G3507E

载重: 200kg

材质: 6061

适用管径: 32-35mm

单重: 0.24kg

表面颜色: 阳极亮银/阳极亮黑



JR Clamp H With Half Connector


Code Number: G3507E Silver
G3507EB Black

Material: 6061

SWL: 200kg

Tube: 32-35mm

Kg: 0.24kg



料号: G3509

载重: 50kg

材质: 6061

适用管径: 30-41mm

单重: 0.24kg

表面颜色: 阳极亮银/阳极亮黑



Bauart geprüft
Sicherheit
Regelwidrige
Produktions-
überwachung

www.tuv.com
ID 1419037981

JR Quick Rig Clamp

Code Number: G3509 Silver


G3509B Black

Material: 6061

SWL: 50kg

Tube: 30-41mm

Kg: 0.24kg



料号: G5001

载重: 100kg

材质: 6061

适用管径: 48-51mm

单重: 0.156kg

表面颜色: 阳极亮银/阳极亮黑



Bauart geprüft
Sicherheit
Regelwidrige
Produktions-
überwachung

www.tuv.com
ID 1419037981

Mini 360

Code Number: G5001 Silver


G5001B Black

Material: 6061

SWL: 100kg

Tube: 48-51mm

Kg: 0.156kg



料号: G5001(40)

载重: 100kg

材质: 6061

适用管径: 38-41mm

单重: 0.133kg

表面颜色: 阳极亮银/阳极亮黑



Bauart geprüft
Sicherheit
Regelwidrige
Produktions-
überwachung

www.tuv.com
ID 1419037981

Mini 360 1.5'

Code Number: G5001(40) Silver


G5001(40)B Black

Material: 6061

SWL: 100kg

Tube: 38-41mm

Kg: 0.133kg



料号: G5001E

载重: 100kg

材质: 6061

适用管径: 48-51mm

单重: 0.187kg

表面颜色: 阳极亮银/阳极亮黑



Bauart geprüft
Sicherheit
Regelwidrige
Produktions-
überwachung

www.tuv.com
ID 1419037981

Mini 360 QR

Code Number: G5001E Silver

G5001EB Black

Material: 6061

SWL: 100kg

Tube: 48-51mm

Kg: 0.187kg



料号: G5001IN


载重: 100kg

材质: 6061

适用管径: 48-51mm

单重: 0.165kg

表面颜色: 阳极亮银/阳极亮黑



Mini 360 HLD

Code Number: G5001IN Silver

G5001INB Black

Material: 6061

SWL: 100kg

Tube: 48-51mm

Kg: 0.165kg



料号: G5002

载重: 100kg

材质: 6061

适用管径: 48-51mm

单重: 0.23kg

表面颜色: 阳极亮银/阳极亮黑



Mini 360 Swivel

Code Number: G5002 Silver


G5002B Black

Material: 6061

SWL: 100kg

Tube: 48-51mm

Kg: 0.23kg



料号: G5001D

载重: 100kg

材质: 6061

适用管径: 48-51mm

单重: 0.38kg

表面颜色: 阳极亮银/阳极亮黑



Mini 360 with TV-Tap

Code Number: G5001D Silver

G5001DB Black

Material: 6061

SWL: 100kg

Tube: 48-51mm

Kg: 0.38kg



料号: G5002E


载重: 100kg

材质: 6061

适用管径: 48-51mm

单重: 0.29kg

表面颜色: 阳极亮银/阳极亮黑



Mini 360 QR Swivel

Code Number: G5002E Silver


G5002EB Black

Material: 6061

SWL: 100kg

Tube: 48-51mm

Kg: 0.29kg



料号: G5003

载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.52kg

表面颜色: 阳极亮银/阳极亮黑



Pro Clamp


Code Number: G5003 Silver
G5003B Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 0.52kg



料号: G5003(60)

载重: 750kg

材质: 6061

适用管径: 58-61mm

单重: 0.63kg

表面颜色: 阳极亮银/阳极亮黑



Pro Clamp 60


Code Number: G5003(60) Silver
G5003B(60) Black

Material: 6061

SWL: 750kg

Tube: 58-61mm

Kg: 0.63kg



料号: G5003(750)

载重: 750kg

材质: 6061

适用管径: 48-51mm

单重: 0.62kg

表面颜色: 阳极亮银/阳极亮黑



X-Pro Clamp


Code Number: G5003(750) Silver
G5003B(750) Black

Material: 6061

SWL: 750kg

Tube: 48-51mm

Kg: 0.62kg



料号: G5003T

载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.68kg

表面颜色: 阳极亮银/阳极亮黑

Pro Clamp With TV-Tap


Code Number: G5003T Silver
G5003TB Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 0.68kg



料号: G5004

载重: 200kg

材质: 6061

适用管径: 48-51mm

单重: 0.36kg


表面颜色: 阳极亮银/阳极亮黑



Narrow Clamp

Code Number: G5004 Silver
G5004B Black

Material: 6061
SWL: 200kg
Tube: 48-51mm
Kg: 0.36kg



料号: G5005

载重: 250kg

材质: 6061

适用管径: 48-51mm

单重: 0.48kg


表面颜色: 阳极亮银/阳极亮黑



Quick Rig Clamp

Code Number: G5005 Silver
G5005B Black

Material: 6061
SWL: 250kg
Tube: 48-51mm
Kg: 0.48kg



料号: G5004(500)

载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.45kg


表面颜色: 阳极亮银/阳极亮黑



X-Narrow Clamp

Code Number: G5004(500) Silver
G5004B(500) Black

Material: 6061
SWL: 500kg
Tube: 48-51mm
Kg: 0.45kg



料号: G5005(500)

载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.8kg

表面颜色: 阳极亮银/阳极亮黑

X-Quick Rig Clamp

Code Number: G5005(500) Silver
G5005B(500) Black

Material: 6061
SWL: 500kg
Tube: 48-51mm
Kg: 0.8kg



料号: G5005(50)


载重: 50kg

材质: 6061

适用管径: 48-51mm

单重: 0.27kg

表面颜色: 阳极亮银/阳极亮黑



S-Quick Rig Clamp

Code Number: G5005(50) Silver
G5005B(50) Black

Material: 6061

SWL: 50kg

Tube: 48-51mm

Kg: 0.27kg



料号: G5006


载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 1.02kg

表面颜色: 阳极亮银/阳极亮黑



Swivel Clamp

Code Number: G5006 Silver
G5006B Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 1.02kg



料号: G5006U


载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 1.02kg

表面颜色: 阳极亮银/阳极亮黑



Pro Swivel Clamp

Code Number: G5006U Silver
G5006UB Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 1.02kg

料号: G5005C(500)

载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.8kg

表面颜色: 阳极亮银/阳极亮黑



X-Quick Rig Eye Clamp


Code Number: G5005C(500) Silver
G5005CB(500) Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 0.8kg





料号: G5006(750)




载重: 750kg

材质: 6061

适用管径: 48-51mm

单重: 1.16kg

表面颜色: 阳极亮银/阳极亮黑



X-Pro Swivel Clamp

Code Number: G5006(750) Silver

G5006(750)B Black

Material: 6061

SWL: 750kg

Tube: 48-51mm

Kg: 1.16kg



料号: G5007




载重: 200kg

材质: 6061

适用管径: 48-51mm

单重: 0.59kg

表面颜色: 阳极亮银/阳极亮黑



Eye Clamp

Code Number: G5007 Silver

G5007B Black

Material: 6061

SWL: 200kg

Tube: 48-51mm

Kg: 0.59kg



料号: G5008



载重: 250kg

材质: 6061

适用管径: 48-51mm


单重: 0.47kg

表面颜色: 阳极亮银/阳极亮黑



料号: G5006M

Swivel Clamp-M
Code Number: G5006M Silver
G5006MB Black
Material: 6061
SWL: 500kg
Tube: 48-51mm & 58-61mm
Kg: 1.253kg



载重: 500kg


材质: 6061

适用管径: 48-51mm & 58-61mm

单重: 1.253kg

表面颜色: 阳极亮银/阳极亮黑

Trigger Clamp
Code Number: G5008 Silver
G5008B Black
Material: 6061
SWL: 250kg
Tube: 48-51mm
Kg: 0.47kg



料号: G5009



载重: 300kg

材质: 6061

适用管径: 48-51mm

单重: 0.398kg

表面颜色: 阳极亮银/阳极亮黑

Side Hook Clamp with Half Connector

Code Number: G5009 Silver


G5009B Black

Material: 6061

SWL: 300kg

Tube: 48-51mm

Kg: 0.398kg



料号: G5010



载重: 300kg

材质: 6061

适用管径: 48-51mm

单重: 0.62kg

表面颜色: 阳极亮银/阳极亮黑

Pro Clamp with Half Connector

Code Number: G5010 Silver


G5010B Black

Material: 6061

SWL: 300kg

Tube: 48-51mm

Kg: 0.62kg



料号: G5026



载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.6kg

表面颜色: 阳极亮银/阳极亮黑

Side Hook Thickener Clamp

Code Number: G5026 Silver


G5026B Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 0.6kg



料号: G5012



载重: 200kg

材质: 6061

适用管径: 48-51mm

单重: 0.68kg

表面颜色: 阳极亮银/阳极亮黑

Swivel Clamp/N

Code Number: G5012 Silver

G5012B Black

Material: 6061

SWL: 200kg

Tube: 48-51mm

Kg: 0.68kg



料号: G5012(500)



载重: 500kg

材质: 6061

适用管径: 48-51mm

单重: 0.8kg

表面颜色: 阳极亮银/阳极亮黑

X-Swivel Clamp/N

Code Number: G5012(500) Silver



G5012B(500) Black

Material: 6061

SWL: 500kg

Tube: 48-51mm

Kg: 0.8kg



料号: SPACER 105

SPACER 270

SPACER 210

材质: 6061

表面颜色: 阳极亮银/阳极亮黑

SPACER for 50mm tube

Code Number: SPACER 105

SPACER 170

SPACER 210

Material: 6061



料号: G5016




载重: 20kg

材质: 6061

适用管径: 48-51mm

单重: 0.22kg

表面颜色: 烤漆黑色/烤漆银色



Quick Snap Clamp

Code Number: G5016 Silver


G5016B Black

Material: 6061

SWL: 20kg

Tube: 48-51mm

Kg: 0.22kg



料号: G5024H

载重: 200kg

材质: 6061

适用管径: 48-51mm

单重: 0.71kg

表面颜色: 阳极亮银/阳极亮黑

Stabiliser Clamp

Code Number: G5024H Silver

G5024HB Black

Material: 6061

SWL: 200kg

Tube: 48-51mm

Kg: 0.71kg



料号: G5034(F24)



载重: 75kg

材质: 6061

适用管径: 32-35mm

单重: 0.19kg

表面颜色: 阳极亮银/阳极亮黑

JR Snap Clamp F24

Code Number: G5034(F24) Silver


G5034B(F24) Black

Material: 6061

SWL: 75kg

Tube: 32-35mm

Kg: 0.19kg



料号: G5035

材质: 6082

适用管径: 48-51mm

单重: 0.25kg

表面颜色: 阳极亮银/阳极亮黑


Claw Clamp

Code Number: G5035

Material: 6082

Tube Size: 48-51mm

Kg: 0.25kg



料号: G5034




载重: 200kg

材质: 6061

适用管径: 48-51mm

单重: 0.29kg

表面颜色: 阳极亮银/阳极亮黑



Snap Clamp F34

Code Number: G5034 Silver

G5034B Black

Material: 6061

SWL: 200kg

Tube: 48-51mm

Kg: 0.29kg



料号: G5036

载重: 250kg

材质: 6061

适用管径: 48-51mm

单重: 0.4kg

表面颜色: 阳极亮银/阳极亮黑

Hook Clamp 25mm

Code Number: G5036 Silver


G5036B Black


Material: 6061

SWL: 250kg

Tube: 48-51mm


Kg: 0.4kg






料号：G5039
载重：60kg
材质：6061
适用管径：48-51mm
单重：0.189kg
表面颜色：阳极亮银/阳极亮黑

Quick and Easy Clamp
Code Number: G5039 Silver
G5039B Black
Material: 6061
SWL: 60kg
Tube: 48-51mm
Kg: 0.189kg




料号：G5043
载重：100kg
材质：6061
适用管径：48-51mm
单重：0.29kg
表面颜色：阳极亮银/阳极亮黑

Quick Panel Clamp
Code Number: G5043 Silver
G5043B Black
Material: 6061
SWL: 100kg
Tube: 48-51mm
Kg: 0.29kg



料号：G5040
载重：5kg
材质：6061
适用管径：10-30mm
单重：0.42kg
表面颜色：阳极亮银/阳极亮黑

Crocodile Clamp
Code Number: G5040 Silver
G5040B Black
Material: 6061
SWL: 5kg
Tube: 10-30mm
Kg: 0.42kg



料号：G5080
载重：150kg
材质：6061
适用管径：48-80mm
单重：0.727kg
表面颜色：阳极亮银/阳极亮黑

X Quick Rig Clamp
Code Number: G5080 Silver
G5080B Black
Material: 6061
SWL: 150kg
Tube: 48-80mm
Kg: 0.727kg



料号: G5028

载重: 40kg

材质: 铁

适用管径: 48-51mm

单重: 0.22kg

表面颜色: 镀蓝锌/染黑



Mini C-Clamp

Code Number: G5028 Silver



G5028B Black

Material: Steel

SWL: 40kg

Tube: 48-51mm

Kg: 0.22kg

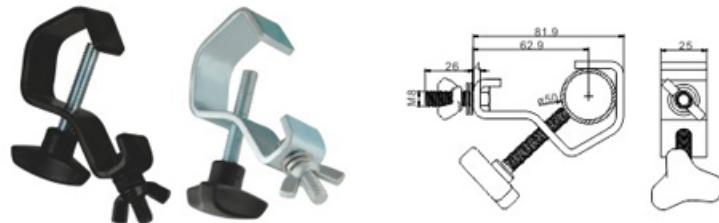

料号: CLM16

载重: 15kg

材质: 铁

适用管径: 30mm

单重: 0.17kg

表面颜色: 镀蓝锌/电著黑



Mini Steel Clamp

Code Number: CLM16 Silver


CLM16B Black

Material: Steel

SWL: 15kg

Tube: 30mm

Kg: 0.17kg



料号: G5031

载重: 75kg

材质: 铁

适用管径: 48-51mm

单重: 0.465kg

表面颜色: 电著黑



Steel Hook Clamp


Code Number: G5031 Black

Material: Steel

SWL: 75kg

Tube: 48-51mm

Kg: 0.465kg



料号: CLM20

载重: 20kg

材质: 铁

适用管径: 50mm

单重: 0.375kg

表面颜色: 镀蓝锌/电著黑



M-Steel Clamp

Code Number: CLM20 Silver

CLM20B Black

Material: Steel

SWL: 20kg

Tube: 50mm

Kg: 0.375kg



料号：CLM55

载重：40kg

材质：铁

适用管径：35–41mm

单重：0.352kg

表面颜色：镀蓝锌/电著黑



Super Steel Clamp

Code Number: CLM55 Silver



CLM55B Black

Material: Steel

SWL: 40kg

Tube: 35–41mm

Kg: 0.352kg



料号：G5011

载重：500kg

材质：6061

适用管径：48–51mm

单重：0.906kg

表面颜色：阳极亮银/阳极亮黑

Side Arm with TV-Tap

Code Number: G5011 Silver

G5011B Black

Material: 6061

SWL 500 kg

Tube: 48–51mm

Kg: 0.906kg



料号：G5011A(210/330)

载重：500kg

材质：6061

适用管径：48–51mm

单重：0.94kg

表面颜色：阳极亮银/阳极亮黑

Side Arm with TV-Tap and Connector

Code Number:

G5011A(210/330) Silver

G5011AB(210/330) Black


Material: 6061

SWL: 500kg

Tube: 48–51mm

Kg: 0.94kg

Length is customized according to requirements



料号：G5011Y(500/600)A

载重：40kg

材质：6061

适用管径：48–51mm

单重：1.08kg

表面颜色：阳极亮银/阳极亮黑

Side Arm

Code Number:

G5011Y(500/600)A Silver

G5011Y(500/600)AB Black

Material: 6061

SWL: 40kg


Tube: 48–51mm

Kg: 1.08kg

Length is customized according to requirements




产品料号: G814C
载重: 500kg/750kg
适用管径: 48-51mm
材质: 6061
单重: 2.4kg
表面颜色: 阳极亮银/阳极亮黑



Swivel Truss Adaptor
Code Number: G814C
Material: 6061
SWL: 500kg/750kg
Tube: 48-51mm
Kg: 2.4kg




料号: G5041
载重: <150kg
材质: 铁
单重: 1.201kg
表面颜色: 镀蓝锌/镀黑锌



Standard Tent Panel
Code Number: G5041 Silver
G5041B Black
Material: Steel
SWL: <150kg
Kg: 1.201kg




料号: G5005T
载重: 150kg
材质: 6061
适用管径: 48-51mm
单重: 0.57kg
表面颜色: 阳极亮银/阳极亮黑



Space Savers
Code Number: G5005T Silver
G5005TB Black
Material: 6061
SWL: 150kg
Tube: 48-51mm
Kg: 0.57kg



料号: G5041A
载重: 250kg
材质: 铁
单重: 1.63kg
表面颜色: 镀蓝锌/镀黑锌



Heavy Tent Panel
Code Number: G5041A Silver
G5041AB Black
Material: steel
SWL: 250kg
Kg: 1.63kg




料号: G5029L/G5029R

材质: 6061

单重: 0.29kg

表面颜色: 阳极亮银/阳极亮黑



Code Number:

Hinge/M12-L / Hinge/M12-R Silver

Hinge/M12-LB / Hinge/M12-RB Black

Material: 6061


Kg: 0.29kg



料号: G0007(F24/F34)

材质: 6061

单重: 0.16kg/0.2kg




End Plug F24/F34

Code Number: G0007(F24/F34)

Material: 6061

Kg: 0.16kg/0.2kg



产品料号: ZDK-418/438

材质: 6082

颜色: 本色

单重: 0.172kg

Locking Elbows Connector

Code number: ZDK-418

ZDK-438

Material: 6082

Kg: 0.172kg




料号: G0010U

材质: 6061

单重: 0.73kg

表面颜色: 阳极亮银/阳极亮黑





DIE Connector/M12

Code Number: G0010U Silver

G0010UB Black


Material: 6061

Kg: 0.73kg

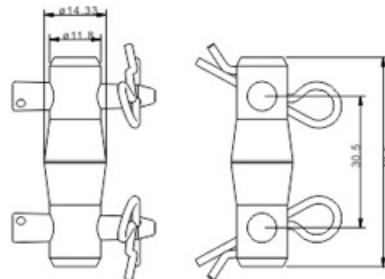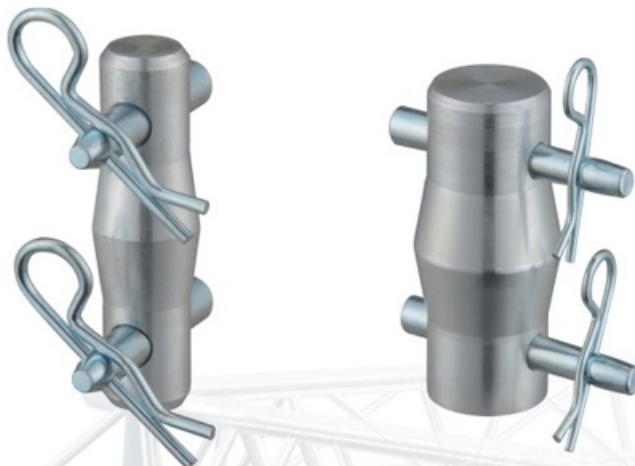


料号: G0002(F14)
材质: 6061
单重: 0.032kg

Connector F14
Code Number: G0002(F14)
Material: 6061
Kg: 0.032kg

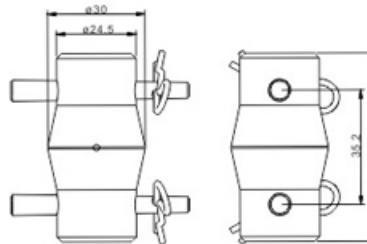


料号: G0002(F24)
材质: 6061
单重: 0.077kg

Connector F24
Code Number: G0002(F24)
Material: 6061
Kg: 0.077kg

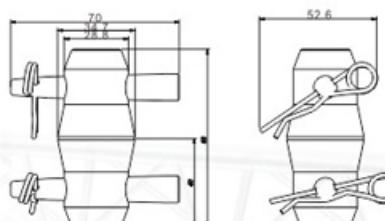


料号: G0002(F34)
材质: 2011
单重: 0.23kg

Connector F34
Code Number: G0002(F34)
Material: 2011
Kg: 0.23kg

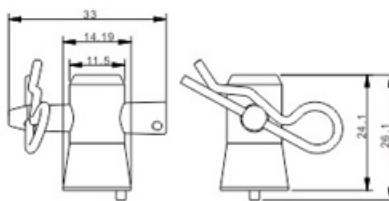


料号: G0003(F14)
材质: S45C
单重: 0.024kg

Half Connector F14 ST
Code Number: G0003(F14)
Material: S45C
Kg: 0.024kg

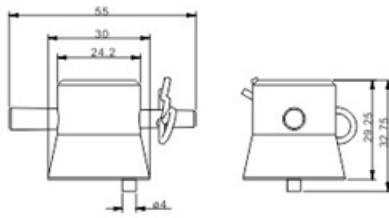


料号: G0003(F24)
材质: S45C
单重: 0.11kg

Half Connector F24 ST
Code Number: G0003(F24)
Material: S45C
Kg: 0.11kg



料号: G0003(F34)
材质: S45C
单重: 0.22kg



Half Connector F34 ST
Code Number: G0003(F34)
Material: S45C
Kg: 0.22kg



料号: G0004(F14)

材质: 6061


单重: 0.018kg

Half Connector F14 AL

Code Number: G0004(F14) Silver

Material: 6061

Kg: 0.018kg



料号: G0004(F24)

材质: 2011


单重: 0.059kg

Half Connector F24 AL

Code Number: G0004(F24) Silver

Material: 2011

Kg: 0.059kg



料号: G0004(F34)

材质: 2011


单重: 0.13kg


Half Connector F34 AL

Code Number: G004(F34)

Material: 2011

Kg: 0.13kg





料号：ZDQ17

载重：350kg

材质：6061

单重：0.17kg

表面颜色：阳极亮银/阳极亮黑

Quick Save Space

Code Number: ZDQ-17 Silver

ZDQ-17B Black

SWL: 350kg

Material: 6061

Kg: 0.17kg



Safety rope 3mm

Lengh: 60cm SWL: 5 kg

Lengh: 80cm SWL: 5 kg

Lengh: 100cm SWL: 9 kg

Safety rope 4mm

Lengh: 60cm SWL: 10 kg

Lengh: 80cm SWL: 10 kg

Lengh: 100cm SWL: 16kg

Safety rope 5mm

Lengh: 60cm SWL: 15 kg

Lengh: 80cm SWL: 15 kg

Lengh: 100cm SWL: 25kg

Safety rope 6mm

Lengh: 60cm SWL: 22 kg

Lengh: 80cm SWL: 22 kg

Lengh: 100cm SWL: 36 kg



G-BK

G-BK54

材质：6061

单重：1.15kg/1.68kg

颜色：阳极雾银

G-BK

G-BK54

Material: 6061

Kg: 1.15kg/1.68kg



PLUS TRUSS®



**LED STACKING
FRAME SYSTEM
FURNITURE
BARRIER
FRAME FOR
STAGE LIGHT
STAGE
PIPE SYSTEM**

STAGE BARRIER



LED STACKING FRAME SYSTEM

A complete LED Screen Frame System designed for versatility and ease of use.

LED Screen Ground stacking system that functions with almost any brand or style of LED screen in your inventory.

The System allows for complete flexibility and allows you to use it in a multitude of ways without changing stacking hardware for each type of screen you use.

A versatile and flexible system designed specifically for the Australian Video Production Market.

Code: **Description:**

LJZ-01(236)	PlusTruss LED Screen Stacking frame-Panel Base 500x 100mm takes 2x adjustable feet
60202-0263	PlusTruss LED Screen Stacking frame-Structure Truss base frame 1000x 230mm takes adjustable feet
60202-0264	PlusTruss LED Screen Stacking frame-Structure frame vertical ladder truss supports-1000x230mm with Half coupler connections
60200-1208	PlusTruss LED Screen Stacking Frame-Cross Braces-1000mm 50mm Tube cross braces with half couplers
M22X150MM	PlusTruss LED Screen Stacking Frame-M22-150mm Adjustable feet, rear foot support
TP-LSSS-001	PlusTruss LED Screen Stacking Frame-Screen to Frame adjustable support-M22 Bolt to Half Coupler connection-adjustable 100-200mm



Black Powder coated
Versatile
Fits most LED Screens
Modular
Flexible
Complete System

FURNITURE



Truss Table Samba



Truss Chair Samba



Bar Stool Curve Chair

Truss Table Curve Wooden

Square Bar Chair



Truss Table Robust



Truss Table Stylish



Bar Stool Stylish Chair




FURNITURE



YZ-YJT01A
Podium with triangle baseplate
演讲台三角底板



YZ-YJT01A
Podium with square baseplate
演讲台四方底座

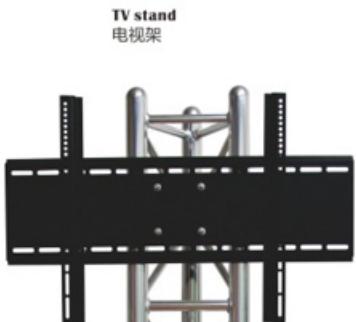

TV stand
电视架

FRAME FOR STAGE LIGHT



GJ02C
Frame for stage light



GJ01-01
Frame for stage light



GJ01-02
Frame for stage light

STAGE



FOLDING STAGE

Folding stage
Size 1X2m
Height 0.2-1.0m
Wooden 21mm Antislip surface

TELESCOPIC STAGE

Telescopic stage
Size 1X2m
Height 0.6-0.9m
Difference size are available



SPLICING STAGE

Assembly stage
Size 1X2M
Height 1.0M
Difference size are available



STAIR FOR STAGE



DJ TABLE



ROUND STAGE

BARRIER

STRAIGHT BARRIER
直防爆栏



ACCESS VOID BARRIER
电源防爆栏
WITH NO SECURITY PLATFORM



BARRIER GATE
开门防爆栏
WITH LOCKABLE GATE



CORNER BARRIER
转角防爆栏



PIPE SYSTEM



CROSS BAR

CB 1.2-2.1M	1.2-2.1 M ADJUSTABLE
CB 1.8-3.0M	1.8-3.0 M ADJUSTABLE
CB 2.4-4.2M	2.4-4.2M ADJUSTABLE
CB 2.7-4.8M	2.7-4.8M ADJUSTABLE


TELESCOPIC LEGS

TL-1.2-2.1M	1.2-2.1 M ADJUSTABLE
TL-1.8-3.0M	1.8-3.0 M ADJUSTABLE
TL-2.4-4.2M	2.4-4.2M ADJUSTABLE
TL-2.7-4.8M	2.7-4.8M ADJUSTABLE
TL-2.4-6.1M	2.4-6.1M ADJUSTABLE

BASE PLATE

BS-450	450 X 450 MM W/ SPIGOT
BS-600	600 X 600MM W/ SPIGOT

PLUSTRUSS®

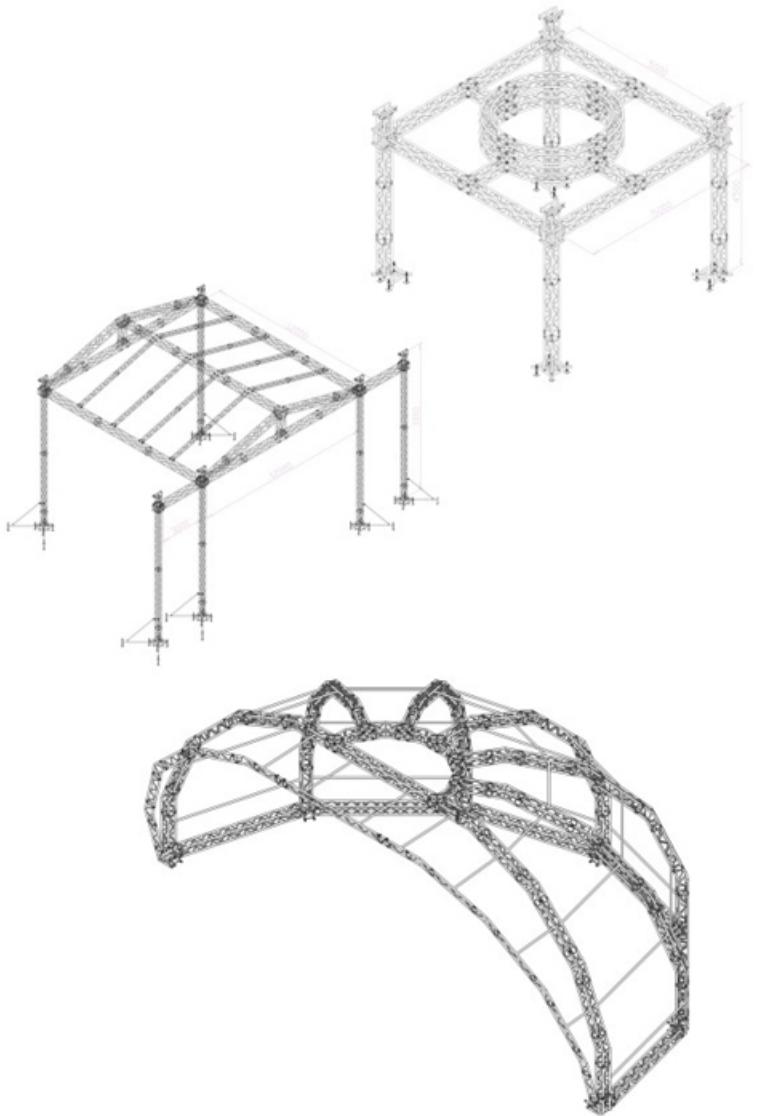

TUV
TRUSS LOADING TABLE

TÜV NORD
EN 1090-1.-3



C E R T I F I C A T E

Management system as per
GB/T 19001-2016/ ISO 9001 : 2015

In accordance with TÜV NORD CERT procedures, it is hereby certified that

PLUSTRUSS INDUSTRIAL LIMITED

Building B2, RongShiTou Industrial Park, No.80 BeiMen Lane,
TianXin Village, HuangJiang Town, DongGuan City, Guangdong
Province, P. R. China

United Social Credit Code: 91441900595890657N

applies a management system in line with the above standard for the following scope

Design and Manufacture of Aluminum Truss Stages

Certificate Registration No. 44 100 1485 0001

Audit Report No. 2.5-6478/2016

Valid from 2018-07-13

Valid until 2020-01-17

Initial Certification 2014-01-18

Certification Body
at TÜV NORD CERT GmbH

This certification was conducted in accordance with the TÜV NORD CERT auditing and certification procedures and is subject to regular surveillance audits. Only when the certified organization accepts regular surveillance audits and successfully passes the audit, can the certificate continue to be effective.

TÜV NORD CERT GmbH Langemarkstrasse 20 45141 Essen www.tuev-nord-cert.com



Note: This certificate information can be queried on the official website of Certification and Accreditation Administration of the People's Republic of China: www.cnca.gov.cn
SIC, PISTAS, SAIA, ETTS, Swiss 2

G14 Truss loading table

Length	UDL	CPL
m	kg/m	kg
1	350	251
2	155	196
3	100	157
4	75	141
5	45	78
6	26	56
7	13	29

G22 loading table (need support at each 1 meter)

Length	UDL	CPL	3rd PL	4th PL	5th PL
m	kg/m	kg	kg	kg	kg
1	200	199	101	68	50
2	101	194	96	66	49
3	68	190	92	64	47
4	50	160	89	62	47
5	39	141	83	60	46
6	32	125	79	59	43

G23 loading table

Span	Span	Central Single Load	Central Single Load	Deflection	single load in the third points	single load in the third points	Deflection	Distributed Load Total	Distributed Load Total	Distributed Load	Distributed Load	Deflection
m	ft	kg	lbs	mm	kg	lbs	mm	kg	lbs	kg/m	lbs/ft	mm
2	6.6	229.3	505.5	1.5	172.0	379.1	1.9	458.6	1011.0	229.3	154.1	1.9
3	9.8	151.4	333.8	3.4	113.6	250.4	4.3	302.8	667.6	100.9	67.8	4.2
4	13.1	112.0	247.0	6.0	84.0	185.2	7.7	224.1	494.0	56.0	37.6	7.5
5	16.4	88.1	194.1	9.5	66.0	145.6	12.0	176.1	388.3	35.2	23.7	11.7
6	19.7	71.8	158.3	13.9	53.8	118.7	17.3	143.6	316.5	23.9	16.1	17.0
7	23.0	59.9	132.1	19.1	44.9	99.1	23.7	119.8	264.1	17.1	11.5	23.3
8	26.2	50.8	112.0	25.3	38.1	84.0	31.2	101.6	223.9	12.7	8.5	30.6
9	29.5	43.5	95.9	32.6	32.6	71.9	39.7	87.0	191.8	9.7	6.5	39.0
10	32.8	37.5	82.6	40.9	28.1	62.0	49.3	75.0	165.3	7.5	5.0	48.5
11	36.1	32.4	71.5	50.5	24.3	53.6	60.1	64.8	142.9	5.9	4.0	59.2
12	39.4	28.0	61.8	61.3	21.0	46.4	72.2	56.1	123.6	4.7	3.1	71.1
13	42.7	24.2	53.4	73.6	18.2	40.0	85.5	48.4	106.7	3.7	2.5	84.3
14	45.9	20.8	45.8	87.3	15.6	34.4	100.1	41.6	91.7	3.0	2.0	98.8
15	49.2	17.7	39.1	102.7	13.3	29.3	116.0	35.4	78.1	2.4	1.6	114.7
16	52.5	14.9	32.9	11.9	11.2	24.7	133.5	29.9	65.8	1.9	1.3	132.1
17	55.8	12.4	27.2	138.8	9.3	20.4	152.4	24.7	54.5	1.5	1.0	151.0
18	59.1	10.0	22.0	159.9	7.5	16.5	172.9	19.9	44.0	1.1	0.7	171.6

G24 loading table

Span	Span	Central Single Load	Central Single Load	Deflection	single load in the third points	single load in the third points	Deflection	Distributed Load Total	Distributed Load Total	Distributed Load	Distributed Load	Deflection
m	ft	kg	lbs	mm	kg	lbs	mm	kg	lbs	kg/m	lbs/ft	mm
2	6.6	531.3	1171.3	1.7	278.5	614.0	2.2	557.0	1227.9	278.5	187.1	2.8
3	9.8	352.3	776.6	3.9	264.2	582.4	5.0	554.7	1222.8	184.9	124.2	6.3
4	13.1	262.2	578.0	7.0	196.6	433.5	8.9	552.3	1217.7	138.1	92.8	11.3
5	16.4	207.6	457.8	11.0	155.7	343.3	13.9	542.2	1195.3	108.4	72.9	17.6
6	19.7	170.9	376.8	15.9	128.2	282.6	20.1	447.6	986.7	74.6	50.1	25.4
7	23.0	144.3	318.2	21.8	108.2	238.6	27.4	379.3	836.2	54.2	36.4	34.7
8	26.2	124.1	273.6	28.7	93.1	205.2	35.9	327.5	722.1	40.9	27.5	45.5
9	29.5	108.1	238.4	36.7	81.1	178.8	45.6	286.7	632.2	31.9	21.4	57.7
10	32.8	95.1	209.7	45.8	71.3	157.2	56.5	253.6	559.2	25.4	17.0	71.5
11	36.1	84.2	185.7	56.1	63.2	139.3	68.7	226.2	498.6	20.6	13.8	86.9
12	39.4	75.0	165.3	67.6	56.2	124.0	82.2	202.8	447.2	16.9	11.4	103.9
13	42.7	67.0	147.7	80.4	50.2	110.7	96.9	182.8	402.9	14.1	9.4	122.5
14	45.9	60.0	132.2	94.5	45.0	99.1	113.1	165.2	364.3	11.8	7.9	142.7
15	49.2	53.7	118.4	110.2	40.3	88.8	130.6	149.7	330.1	10.0	6.7	164.7
16	52.5	48.1	106.0	127.3	36.1	79.5	149.5	135.9	299.5	8.5	5.7	188.5

G32 loading table (Need support at each 1 meter)

Length	UDL	CPL	3rd PL	4th PL	5th PL
m	kg/m	kg	kg	kg	kg
2	550	695	549	360	273
3	370	577	498	330	264
4	245	492	370	243	199
5	149	391	295	195	163
6	101	322	241	158	130
7	77	272	201	130	105
8	58	235	173	109	93
9	44	199	150	95	80
10	35	185	129	84	68

G33 loading table

Span	Span	Central Single Load	Central Single Load	Deflection	single load in the third points	single load in the third points	Deflection	Distributed Load Total	Distributed Load Total	Distributed Load	Distributed Load	Deflection
m	ft	kg	lbs	mm	kg	lbs	mm	kg	lbs	kg/m	lbs/ft	mm
2	6.6	1073.1	12365.7	2.8	804.8	1774.3	3.6	2146.1	14731.4	1073.1	721.1	3.5
3	9.8	712.5	1570.9	6.3	534.4	1178.2	8.1	1425.1	13141.8	475.0	319.2	7.9
4	13.1	531.4	1171.6	11.3	398.6	878.7	14.4	1062.9	2343.2	265.7	178.6	14.1
5	16.4	422.1	930.5	17.7	316.6	697.9	22.5	844.2	1861.0	168.8	113.4	22.0
6	19.7	348.6	768.6	25.6	261.5	576.4	32.5	697.2	1537.1	116.2	78.1	31.8
7	23.0	295.6	651.8	35.1	221.7	488.8	44.3	591.3	1303.6	84.5	56.8	43.4
8	26.2	255.5	563.3	46.1	191.6	422.5	58.0	511.0	1126.6	63.9	42.9	56.8
9	29.5	223.9	493.6	58.8	167.9	370.2	73.6	447.8	987.2	49.8	33.4	72.1
10	32.8	198.3	437.1	73.1	148.7	327.8	91.1	396.5	874.2	39.7	26.6	89.3
11	36.1	177.0	390.2	89.2	132.7	292.7	110.6	354.0	780.4	32.2	21.6	108.4
12	39.4	159.0	350.5	107.2	119.2	262.9	132.1	318.0	701.0	26.5	17.8	129.6
13	42.7	143.5	316.3	127.0	107.6	237.2	155.6	287.0	632.6	22.1	14.8	152.7
14	45.9	129.9	286.5	148.9	97.5	214.9	181.2	259.9	573.0	18.6	12.5	178.0
15	49.2	118.0	260.1	172.9	88.5	195.1	208.9	236.0	520.2	15.7	10.6	205.3
16	52.5	107.3	236.6	199.0	80.5	177.4	238.8	214.6	473.2	13.4	9.0	234.9
17	55.8	97.7	215.4	227.5	73.3	161.5	271.0	195.4	430.8	11.5	7.7	266.6
18	59.1	89.0	196.1	258.4	66.7	147.1	305.4	177.9	392.2	9.9	6.6	300.7

G34 loading table

Span	Span	Central Single Load	Central Single Load	Deflection	single load in the third points	single load in the third points	Deflection	Distributed Load Total	Distributed Load Total	Distributed Load	Distributed Load	Deflection
m	ft	kg	lbs	mm	kg	lbs	mm	kg	lbs	kg/m	lbs/ft	mm
2	6.6	2482.8	5473.7	3.3	1366.3	3012.1	4.2	2732.5	6024.2	1366.3	918.1	4.1
3	9.8	1651.1	3640.0	7.4	1238.3	2730.0	9.4	2727.5	6013.2	909.2	610.9	9.2
4	13.1	1233.9	2720.4	13.2	925.5	2040.3	16.8	2467.9	5440.7	617.0	414.6	16.4
5	16.4	982.7	2166.4	20.6	737.0	1624.8	26.3	1965.3	4332.8	393.1	264.1	25.7
6	19.7	814.3	1795.3	29.8	610.7	1346.4	37.8	1628.6	3590.5	271.4	182.4	37.0
7	23.0	693.4	1528.6	40.7	520.0	1146.4	51.6	1386.7	3057.2	198.1	133.1	50.5
8	26.2	602.0	1327.2	53.4	451.5	995.4	67.5	1204.0	2654.4	150.5	101.1	66.1
9	29.5	530.4	1169.4	67.8	397.8	877.0	85.5	1060.8	2338.7	117.9	79.2	83.8
10	32.8	472.6	1042.0	84.2	354.5	781.5	105.8	945.3	2084.0	94.5	63.5	103.6
11	36.1	424.9	936.8	102.4	318.7	702.6	128.3	849.8	1873.6	77.3	51.9	125.7
12	39.4	384.7	848.2	122.6	288.6	636.1	153.0	769.5	1696.4	64.1	43.1	150.0
13	42.7	350.3	772.4	144.8	262.8	579.3	180.0	700.7	1544.8	53.9	36.2	176.5
14	45.9	320.5	706.6	169.1	240.4	530.0	209.4	641.0	1413.2	45.8	30.8	205.3
15	49.2	294.3	648.9	195.6	220.8	486.7	241.0	588.7	1297.8	39.2	26.4	236.5
16	52.5	271.1	597.7	224.2	203.3	448.3	275.1	542.2	1195.4	33.9	22.8	270.0

G34P loading table

Span	Span	Central Single Load	Central Single Load	Deflection	single load in the third points	single load in the third points	Deflection	Distributed Load Total	Distributed Load Total	Distributed Load	Distributed Load	Deflection
m	ft	kg	lbs	mm	kg	lbs	mm	kg	lbs	kg/m	lbs/ft	mm
2	6.6	2729.0	6016.5	2.9	1364.5	3008.2	3.7	2729.0	6016.5	1364.5	916.9	3.7
3	9.8	2165.4	4773.8	6.6	1360.8	3000.0	8.4	2721.6	6000.0	907.2	609.6	8.3
4	13.1	1617.5	3566.0	11.8	1213.1	2674.5	15.0	2714.1	15983.5	678.5	455.9	14.7
5	16.4	1287.3	2837.9	18.5	965.4	2128.4	23.5	2574.5	5675.9	514.9	346.0	23.0
6	19.7	1065.9	2349.8	26.7	799.4	1762.4	33.9	2131.7	4699.7	355.3	238.7	33.1
7	23.0	906.7	1998.8	36.5	680.0	1499.1	46.2	1813.3	3997.7	259.0	174.1	45.2
8	26.2	786.3	1733.5	47.8	589.7	1300.2	60.4	1572.6	3467.1	196.6	132.1	59.1
9	29.5	691.9	1525.4	60.8	518.9	1144.0	76.6	1383.8	3050.7	153.8	103.3	75.0
10	32.8	615.6	1357.2	75.5	461.7	1017.9	94.7	1231.2	2714.3	123.1	82.7	92.8
11	36.1	552.5	1218.1	92.0	414.4	913.5	114.9	1105.0	2436.1	100.5	67.5	112.6
12	39.4	499.3	1100.8	110.2	374.5	825.6	137.1	998.6	2201.5	83.2	55.9	134.4
13	42.7	453.7	1000.2	130.3	340.3	750.2	161.4	907.4	2000.5	69.8	46.9	158.2
14	45.9	414.1	912.9	152.3	310.6	684.7	187.7	828.2	1825.8	59.2	39.8	184.2
15	49.2	379.3	836.1	176.3	284.4	627.1	216.2	758.5	1672.2	50.6	34.0	212.2
16	52.5	348.3	767.9	202.3	261.2	575.9	246.8	696.6	1535.8	43.5	29.3	242.4
17	55.8	320.6	706.7	230.5	240.4	530.1	279.7	641.1	1413.4	37.7	25.3	274.7
18	59.1	295.5	651.4	261.0	221.6	488.6	314.7	591.0	1302.9	32.8	22.1	309.4

G43 loading table

Length	UDL	CPL	3rd PL	4th PL	5th PL
m	kg/m	kg	kg	kg	kg
1	910	545	520	479	453
2	668	478	438	381	354
3	467	425	382	317	240
4	314	383	341	272	289
5	198	348	302	239	243
6	136	318	273	204	206
7	101	294	249	174	169
8	75	273	226	150	142
9	70	253	198	130	123
10	45	231	174.5	116	110
11	37	207	156	103	95
12	33	187	140	92	85
13	25.8	168.5	129	82.5	76
14	22.5	158	113	75	68
15	18.8	142	103	67	60
16	15	127	94	62	50
17	12	115	85	55	47
18	10	104	78	50	42

G44 loading table

Span	Span	Central Single Load	Central Single Load	Deflection	single load in the third points	single load in the third points	Deflection	Distributed Load Total	Distributed Load Total	Distributed Load	Distributed Load	Deflection
m	ft	kg	lbs	mm	kg	lbs	mm	kg	lbs	kg/m	lbs/ft	mm
2	6.6	3609.6	7957.8	2.7	1804.8	3978.9	3.4	3609.6	7957.8	1804.8	1212.8	2.3
3	9.8	2405.2	5302.6	6.0	1803.9	3976.9	7.7	3603.0	7943.2	1201.0	807.0	5.2
4	13.1	1798.1	3964.1	10.7	1348.6	2973.1	13.7	2457.6	5418.1	614.4	412.9	9.2
5	16.4	1432.5	3158.1	16.8	1074.4	2368.6	21.4	1954.1	4308.1	390.8	262.6	14.4
6	19.7	1187.7	2618.3	24.3	890.7	1963.7	30.8	1616.2	3563.2	269.4	181.0	20.7
7	23.0	1011.8	2230.7	33.1	758.9	1673.0	42.0	1373.0	3027.0	196.1	131.8	28.3
8	26.2	879.1	1938.1	43.4	659.3	1453.6	54.9	1188.9	2621.1	148.6	99.9	37.0
9	29.5	775.2	1708.9	55.2	581.4	1281.7	69.6	1044.3	2302.2	116.0	78.0	46.9
10	32.8	691.3	1524.1	68.4	518.5	1143.1	86.1	927.2	2044.2	92.7	62.3	58.1
11	36.1	622.1	1371.6	83.2	466.6	1028.7	104.4	830.2	1830.4	75.5	50.7	70.6
12	39.4	563.9	1243.2	99.6	422.9	932.4	124.5	748.3	1649.8	62.4	41.9	84.2
13	42.7	514.2	1133.5	117.6	385.6	850.1	146.5	678.0	1494.7	52.2	35.0	99.2
14	45.9	471.0	1038.4	137.2	353.3	778.8	170.3	616.7	1359.7	44.1	29.6	115.6
15	49.2	433.2	955.0	158.6	324.9	716.3	196.0	562.8	1240.7	37.5	25.2	133.2
16	52.5	399.7	881.2	181.7	299.8	660.9	223.6	514.7	1134.8	32.2	21.6	152.3

G44P loading table

Span	Span	Central Single Load		Central Single Load		Deflection	
		kg	lbs	kg	lbs		
2	6.6	3578.3	7888.8	2.0	1789.1	3944.4	2.6
3	9.8	3161.1	6969.0	4.6	1784.8	3934.8	5.8
4	13.1	2363.2	5210.0	8.2	1772.4	3907.5	10.4
5	16.4	1882.7	4150.7	12.8	1412.0	3113.0	16.3
6	19.7	1560.9	3441.3	18.4	1170.7	2581.0	23.4
7	23.0	1329.8	2931.8	25.2	997.4	2198.9	31.9
8	26.2	1155.4	2547.3	33.0	866.6	1910.5	41.8
9	29.5	1018.8	2246.1	41.9	764.1	1684.6	52.9
10	32.8	908.6	2003.2	52.0	681.5	1502.4	65.5
11	36.1	817.7	1802.8	63.3	613.3	1352.1	79.4
12	39.4	741.2	1634.1	75.7	555.9	1225.6	94.7
13	42.7	675.8	1489.9	89.4	506.9	1117.5	111.4
14	45.9	619.1	1365.0	104.3	464.4	1023.7	129.5
15	49.2	569.4	1255.4	120.5	427.1	941.5	149.0
16	52.5	525.4	1158.3	138.1	394.0	868.7	170.0
17	55.8	486.0	1071.5	157.1	364.5	803.6	192.5
18	59.1	450.5	993.3	177.6	337.9	745.0	216.5

Span	Span	Central Single Load		Central Single Load		Deflection	
		kg	lbs	kg	lbs		
2	6.6	3578.3	7888.8	2.0	1789.1	3944.4	2.6
3	9.8	3161.1	6969.0	4.6	1784.8	3934.8	5.8
4	13.1	2363.2	5210.0	8.2	1772.4	3907.5	10.4
5	16.4	1882.7	4150.7	12.8	1412.0	3113.0	16.3
6	19.7	1560.9	3441.3	18.4	1170.7	2581.0	23.4
7	23.0	1329.8	2931.8	25.2	997.4	2198.9	31.9
8	26.2	1155.4	2547.3	33.0	866.6	1910.5	41.8
9	29.5	1018.8	2246.1	41.9	764.1	1684.6	52.9
10	32.8	908.6	2003.2	52.0	681.5	1502.4	65.5
11	36.1	817.7	1802.8	63.3	613.3	1352.1	79.4
12	39.4	741.2	1634.1	75.7	555.9	1225.6	94.7
13	42.7	675.8	1489.9	89.4	506.9	1117.5	111.4
14	45.9	619.1	1365.0	104.3	464.4	1023.7	129.5
15	49.2	569.4	1255.4	120.5	427.1	941.5	149.0
16	52.5	525.4	1158.3	138.1	394.0	868.7	170.0
17	55.8	486.0	1071.5	157.1	364.5	803.6	192.5
18	59.1	450.5	993.3	177.6	337.9	745.0	216.5

G54 Loading table


Span	Span	Central Single Load		Central Single Load		Deflection	
		kg	lbs	kg	lbs		
2	6.6	5405.7	11917.6	1.2	2702.9	5958.8	1.5
3	9.8	5394.1	11189.1	2.7	2697.0	5945.9	3.5
4	13.1	3270.0	7209.2	4.8	2691.2	5933.1	6.1
5	16.4	2605.5	5744.2	7.5	1954.2	4308.2	9.6
6	19.7	2160.6	4763.3	10.9	1620.4	3572.5	13.8
7	23.0	1841.1	4058.9	14.9	1380.8	3044.2	18.9
8	26.2	1600.0	3527.4	19.5	1200.0	2645.6	24.7
9	29.5	1411.2	3111.2	24.7	1058.4	2333.4	31.3
10	32.8	1259.0	2775.6	30.7	944.3	2081.7	38.6
11	36.1	1133.4	2498.7	37.3	850.1	1874.1	46.8
12	39.4	1027.8	2265.9	44.6	770.8	1699.4	55.9
13	42.7	937.5	2066.8	52.7	703.1	1550.1	65.7
14	45.9	859.3	1894.4	61.5	644.5	1420.8	76.4
15	49.2	790.7	1743.2	71.0	593.0	1307.4	87.9
16	52.5	730.0	1609.3	81.4	547.5	1207.0	100.3
17	55.8	675.7	1489.7	92.6	506.8	1117.3	113.5
18	59.1	626.8	1381.9	104.6	470.1	1036.5	127.7
19	62.3	582.5	1284.2	117.5	436.9	963.1	142.7
20	65.6	542.0	1194.9	131.3	406.5	896.2	158.7
21	68.9	504.8	1112.8	146.0	378.6	834.7	175.6
22	72.2	470.4	1037.1	161.7	352.8	777.9	193.4
23	75.5	438.6	966.9	178.4	328.9	725.2	212.2
24	78.7	408.9	901.4	196.2	306.7	676.1	231.9
25	82.0	381.1	840.1	215.1	285.8	630.1	252.7
26	85.3	355.0	782.6	235.1	266.2	587.0	274.5
27	88.6	330.4	728.3	256.2	247.8	546.3	297.3
28	91.9	307.1	677.1	278.6	230.3	507.8	321.2
29	95.1	285.0	628.4	302.3	213.8	471.4	346.2
30	98.4	264.1	582.2	327.2	198.1	436.7	372.3

G7652 Loading table

Span m	Span ft	Central Single Load		Central Single Load		Deflection mm	single load in the third points kg	single load in the third points lbs	Deflection mm	Distributed Load Total kg	Distributed Load Total lbs	CPL kg/m	Distributed Load Total kg/m	Distributed Load lbs/ft	Deflection mm
		kg	lbs	kg	lbs										
2	6.6	3535.9	7795.4	0.8	1768.0	3897.7	1.0	3535.9	7795.4	1768.0	1188.0	1.0			
3	9.8	3522.6	7766.1	1.8	1761.3	3883.0	2.3	3522.6	7766.1	1174.2	789.0	2.3			
4	13.1	3509.3	7736.8	3.2	1754.7	3868.4	4.1	3509.3	7736.8	877.3	589.5	4.0			
5	16.4	3496.1	7707.5	5.1	1748.0	3853.7	6.5	3496.1	7707.5	699.2	469.8	6.3			
6	19.7	3230.2	7121.3	7.3	1741.4	3839.1	9.3	3482.8	7678.2	580.5	390.1	9.1			
7	23.0	2756.4	6076.8	10.0	1734.7	3824.4	12.7	3469.5	7648.9	495.6	333.1	12.4			
8	26.2	2399.4	5289.7	13.1	1728.1	3809.8	16.6	3456.2	7619.6	432.0	290.3	16.2			
9	29.5	2120.2	4674.3	16.6	1590.2	3505.7	21.0	3442.9	7590.3	382.5	257.1	20.6			
10	32.8	1895.6	4179.0	20.5	1421.7	3134.3	26.0	3429.6	7561.0	343.0	230.5	25.4			
11	36.1	1710.6	3771.1	24.9	1282.9	2828.4	31.5	3416.3	7531.7	310.6	208.7	30.8			
12	39.4	1555.3	3428.8	29.8	1166.5	2571.6	37.5	3110.6	6857.6	259.2	174.2	36.7			
13	42.7	1422.9	3136.9	35.1	1067.2	2352.7	44.1	2845.7	6273.8	218.9	147.1	43.2			
14	45.9	1308.4	2884.6	40.9	981.3	2163.4	51.2	2616.8	5769.1	186.9	125.6	50.2			
15	49.2	1208.3	2663.9	47.2	906.3	1998.0	58.9	2416.7	5327.9	161.1	108.3	57.7			
16	52.5	1119.9	2469.1	54.0	840.0	1851.8	67.2	2239.9	4938.1	140.0	94.1	65.8			
17	55.8	1041.2	2295.4	61.4	780.9	1721.6	76.0	2082.3	4590.8	122.5	82.3	74.5			
18	59.1	970.4	2139.4	69.2	727.8	1604.6	85.4	1940.8	4278.8	107.8	72.5	83.8			
19	62.3	906.4	1998.3	77.6	679.8	1498.7	95.4	1812.8	3996.5	95.4	64.1	93.6			
20	65.6	848.1	1869.8	86.5	636.1	1402.4	105.9	1696.2	3739.5	84.8	57.0	104.0			
21	68.9	794.8	1752.1	96.1	596.1	1314.1	117.1	1589.5	3504.3	75.7	50.9	115.0			
22	72.2	745.6	1643.9	106.2	559.2	1232.9	128.9	1491.3	3287.7	67.8	45.5	126.6			
23	75.5	700.2	1543.7	117.0	525.2	1157.8	141.3	1400.4	3087.5	60.9	40.9	138.9			
24	78.7	658.0	1450.7	128.3	493.5	1088.1	154.3	1316.1	2901.4	54.8	36.8	151.7			
25	82.0	618.7	1364.0	140.4	464.0	1023.0	168.0	1237.4	2727.9	49.5	33.3	165.2			
26	85.3	581.9	1282.8	153.1	436.4	962.1	182.3	1163.7	2565.6	44.8	30.1	179.4			
27	88.6	547.3	1206.5	166.5	410.5	904.9	197.3	1094.5	2413.0	40.5	27.2	194.2			
28	91.9	514.7	1134.6	180.6	386.0	851.0	212.9	1029.3	2269.3	36.8	24.7	209.7			
29	95.1	483.9	1066.7	195.5	362.9	800.1	229.2	967.7	2133.5	33.4	22.4	225.8			
30	98.4	454.7	1002.4	211.2	341.0	751.8	246.2	909.3	2004.7	30.3	20.4	242.7			

LS305 loading table

Length m	Loading kg/m	CPL kg	2 Points Loading kg
3	946	1419	1064
4	528	1056	792
5	335	837	628
6	230	689	517
7	166	582	437
8	125	501	376
9	97	427	328
10	77	385	288
11	62	341	256
12	51	304	228
13	42	272	204
14	35	244	183
15	29	219	164
16	25	196	147

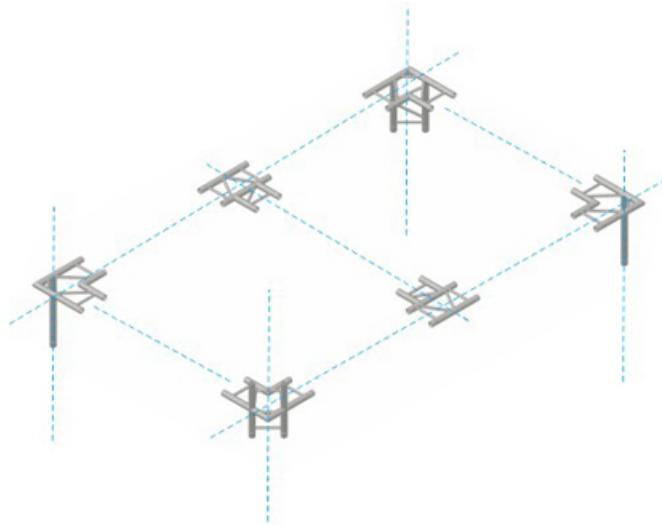


18175-2

Dipl.-Ing. Büro T. Brandt
Büro für Baustatik



Seite 1



Statische Berechnung *structural report*



500kg

Auftraggeber /
supplier:
Plusstruss Industrial Limited
Building B2; RongShuTou Industrial Park,
No. 80 Beimen Lane, TianXin, Huang-Jiang Town,
DongGuan City, Guang Preovince, 523750. P.R.C.

Aufsteller /
*structural
engineer:*
Dipl.- Ing. T. Brandt
Brookstr. 8
49497 Mettingen
Germany
Tel. 05452/ 935082 Fax. - / 935083

Diese statische Berechnung ist ausschließlich für die Firma "Plusstruss" erstellt worden. Eine Weitergabe an Dritte, auch auszugsweise ist nur mit vorheriger Genehmigung des Aufstellers bzw. der Firma "Plusstruss" erlaubt. / This calculation is only for internal use at "Plusstruss". It is forbidden to give this calculation or parts of it to other companies or people.

Aufgestellt: Mettingen im September 2018



Der Nachweis umfasst die Seiten 1-31
This proof compromises the pages 1-31

Auftrags-Nr. 18175-2

Dipl.-Ing. Büro T. Brandt
Büro für Baustatik



Seite 1



Statische Berechnung *structural report*



750kg

Auftraggeber /
supplier:
Plusstruss Industrial Limited
Building B2; RongShuTou Industrial Park,
No. 80 Beimen Lane, TianXin, Huang-Jiang Town,
DongGuan City, Guang Preovince, 523750. P.R.C.

Aufsteller /
*structural
engineer:*
Dipl.- Ing. T. Brandt
Brookstr. 8
49497 Mettingen
Germany
Tel. 05452/ 935082 Fax. - / 935083

Diese statische Berechnung ist ausschließlich für die Firma "Plusstruss" erstellt worden. Eine Weitergabe an Dritte, auch auszugsweise ist nur mit vorheriger Genehmigung des Aufstellers bzw. der Firma "Plusstruss" erlaubt. / This calculation is only for internal use at "Plusstruss". It is forbidden to give this calculation or parts of it to other companies or people.

Aufgestellt: Mettingen im September 2018



Der Nachweis umfasst die Seiten 1-31
This proof compromises the pages 1-31

Auftrags-Nr. 18175-1

